


TOSHIBA

Isolators and Solid State Relays

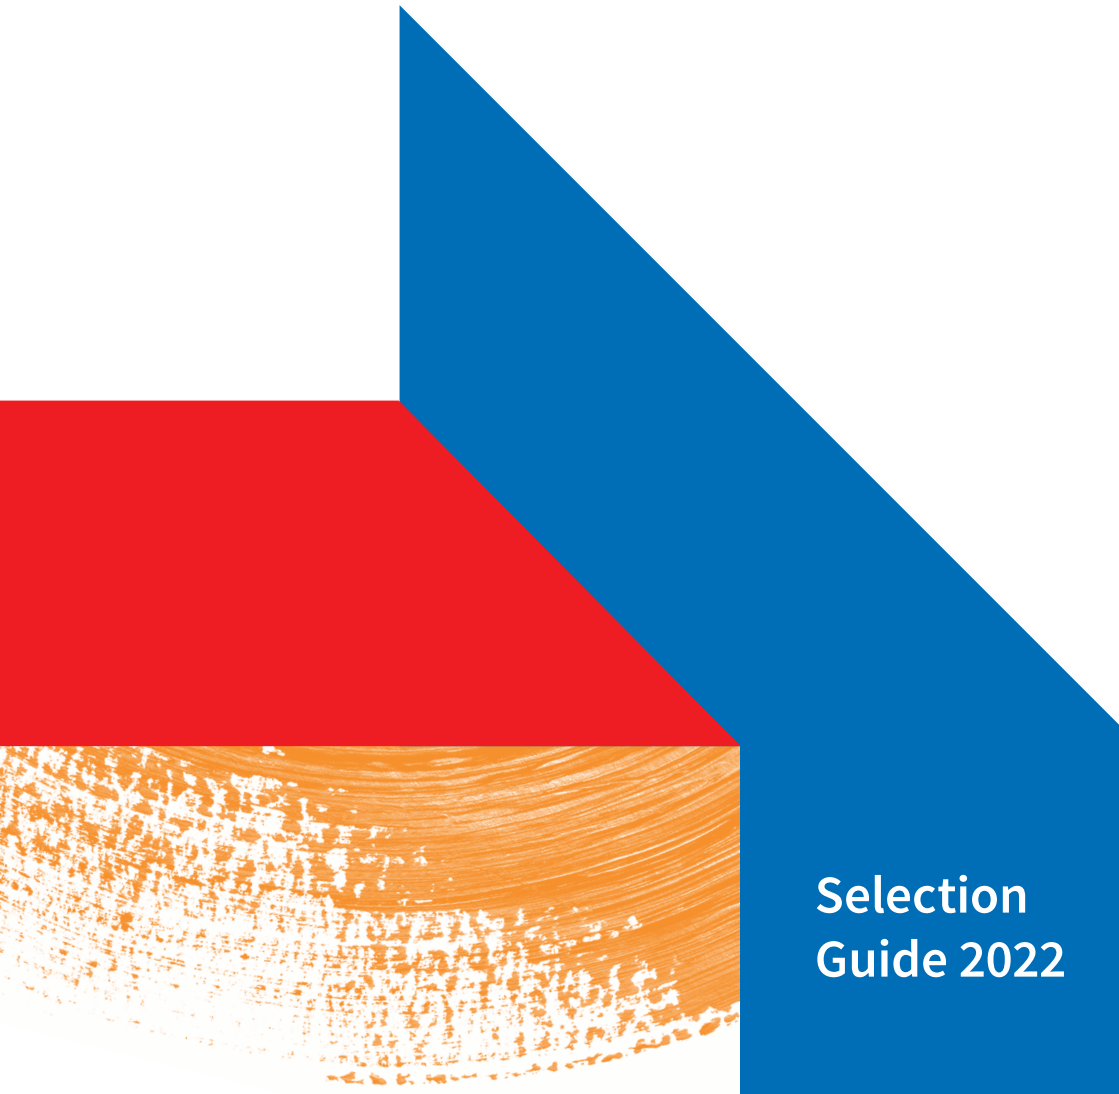

Selection
Guide 2022

Contents

1. Isolators	3 - 16
1-1 Photocouplers	3 - 15
1-1-1 IC Output	
■ Logic	3
■ High Speed Logic	4 - 7
■ IPM Driver	8 - 9
■ IGBT / MOSFET Driver	10 - 11
■ Smart Gate Driver	12
■ Isolation Amplifiers / Delta-Sigma Modulators	13
1-1-2 Transistor Output	14 - 15
1-2 Digital Isolators	
1-2-1 Standard Digital Isolators	16
2. Solid State Relays	17 - 24
2-1 Photorelays	17 - 22
■ MOSFET Output 1-Form-A	
■ MOSFET Output 2-Form-A	
■ MOSFET Output 1-Form-A / 1-Form-B	
■ MOSFET Output 1-Form-B	
■ MOSFET Output 2-Form-B	
2-2 Photovoltaic Output	23
2-3 Triac Output	24
3. Automotive Devices	25 - 26
■ Photocouplers	
■ Photorelays	
4. Device Packages	27 - 36
■ Dimensional Out Line (Surface Mount Type)	
■ Dimensional Out Line (Through Hole Type)	
■ Lead Form Options	
5. Cross Reference	37 - 47
6. Part Naming Conventions	48
7. Part Number Index	49 - 51

1. Isolators

1-1 Photocouplers

1-1-1 IC Output

Logic


Open-collector Output Type

Part Number	Data Rate (Mbps)	Current Transfer Ratio CTR min (%) @Ta=25 °C	Propagation Delay Time		Supply Voltage Operating Range V _{CC} (Note1)		High / Low-level Supply Current I _{CC} max (mA)	Common Mode Transient Immunity CM min (kV / μs)	Operating Temperature T _{opr}		Isolation Voltage BV _s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
			t _{pLH} max (μs)	t _{pHL} max (μs)	min (V)	max (V)			min (°C)	max (°C)				
			TLP2301	0.02	50 (@I _F =1 mA)	30			30	-				
TLP2701	0.02	50 (@I _F =1 mA)	30	30	-	40	-	-	-55	125	5000	4pin SO6L	(A)	-
TLP2303	0.1	900 (@I _F =0.5 mA)	90	20	4.5	18	1.5	+/-15	-40	125	3750	5pin SO6	(B)	-
TLP2703	0.1	900 (@I _F =0.5 mA)	90	20	4.5	18	1.5	+/-15	-40	125	5000	SO6L	(C)	-
TLP2403	0.3	400 (@I _F =0.5 mA)	90	30	-	16	1.5	-	-40	100	3750	SO8	(D)	-
TLP109	1	20 (@I _F =16 mA)	0.8	0.8	-	30	0.001	+/-5	-55	125	3750	5pin SO6	(E)	-
TLP2309	1	15 (@I _F =10 mA)	1	1	2.7	20	0.001	+/-15	-40	110	3750	5pin SO6	(E)	-
TLP2409	1	20 (@I _F =16 mA)	0.8	0.8	-	30	0.001	+/-5	-55	125	3750	SO8	(F)	-
TLP2719 ☆	1	15 (@I _F =16 mA)	2	0.85	4.5	20	0.001	+/-10	-40	100	5000	SO6L	(G)	✓

☆ New Products

Note1: Recommended Operating Condition

Pin Configuration

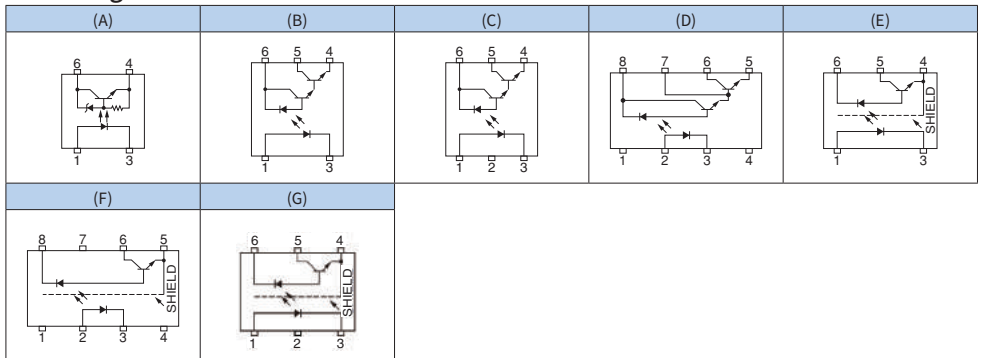

High Speed Logic

Open-collector Output Type

Part Number	Data Rate (Mbps)	Threshold LED Input Current I_{FHL} max (mA)	Propagation Delay Time		Supply Voltage Operating Range V_{CC} (Note1)		High / Low-level Supply Current I_{CC} max (mA)	Common Mode Transient Immunity CM min (kV / μ s)	Operating Temperature T_{opr}		Isolation Voltage BV _s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
									min (°C)	max (°C)				
			t_{PLH} max (ns)	t_{PHL} max (ns)	min (V)	max (V)								
TLP2309	1	10 (Note2)	1000	1000	2.7	20	0.001	+/-15	-40	110	3750	5pin SO6	(A)	-
TLP2719 ☆	1	10 (Note2)	2000	850	4.5	20	0.001	+/-10	-40	100	5000	SO6L	(F)	✓
TLP104	1	5	550	400	4.5	30	1.3	+/-15	-40	125	3750	5pin SO6	(B)	-
TLP2304 ☆	1	5	550	400	4.5	30	1.3	+/-20	-40	125	3750	5pin SO6	(B)	-
TLP2404	1	5	550	400	4.5	30	1.3	+/-15	-40	125	3750	SO8	(C)	-
TLP2704	1	5	550	400	4.5	30	1.3	+/-20	-40	125	5000	SO6L	(D)	✓
TLP2362	10	5	100	100	2.7	5.5	4	+/-20	-40	125	3750	5pin SO6	(B)	-
TLPN137	10	5	100	100	4.5	5.5	4	+/-10	-40	85	5000	DIP8	(C)	-
TLP2363 ☆	15	2.4 (min 0.3)	80	80	2.7	5.5	4	+/-20	-40	105	3750	5pin SO6	(B)	-
TLP2662 (Note3)	15	5	75	75	2.7	5.5	8	+/-20	-40	125	5000	DIP8	(E)	✓
TLP2962	15	5	75	75	2.7	5.5	4	+/-20	-40	125	5000	DIP8	(C)	✓
TLP2118E (Note3)	15	5	75	75	4.5	5.5	10	+/-15	-40	100	2500	SO8	(E)	-
TLP2418	15	5	75	75	4.5	5.5	5	+/-15	-40	125	3750	SO8	(C)	-
TLP2168 (Note3)	20	5	60	60	2.7	5.5	8	+/-15	-40	125	2500	SO8	(E)	-
TLP2368	20	5	60	60	2.7	5.5	4	+/-20	-40	125	3750	5pin SO6	(B)	-
TLP2468	20	5	60	60	2.7	5.5	4	+/-15	-40	125	3750	SO8	(C)	-
TLP2768A	20	5	60	60	2.7	5.5	4	+/-20	-40	125	5000	SO6L	(D)	✓


☆ New Products

Note1: Recommended Operating Condition

Note2: Input on-state current ($I_{F(ON)}$) min (Recommended Operating Conditions)

Note3: Dual channel version

Pin Configuration

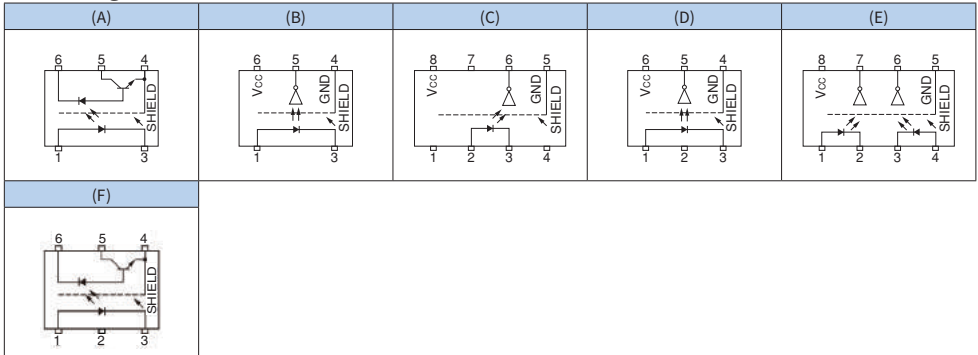

Totem-pole (Inverter) Output Type

Part Number	Data Rate (Mbps)	Threshold LED Input Current IFHL max (mA)	Propagation Delay Time		Supply Voltage Operating Range VCC / VDD (Note1)		High / Low level Supply Current ICC / IDD max (mA)	Common Mode Transient Immunity CM min (kV / μs)	Operating Temperature		Isolation Voltage BV _s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
									T _{opr}					
			t _{PLH} max (ns)	t _{PHL} max (ns)	min (V)	max (V)			min (°C)	max (°C)				
TLP2358	5	1.6	250	250	3	20	3	+/-20	-40	125	3750	5pin SO6	(A)	-
TLP2108 (Note2)	5	1.6	250	250	4.5	20	6	+/-10	-40	100	2500	SO8	(C)	-
TLP2408	5	1.6	250	250	4.5	20	3	+/-15	-40	100	3750	SO8	(B)	-
TLP2348	10	1.6	120	120	4.5	30	3	+/-30	-40	110	3750	5pin SO6	(A)	-
TLP2748	10	1.6	120	120	4.5	30	3	+/-30	-40	110	5000	SO6L	(D)	✓
TLP2161 (Note2)	15	1.6	80	80	2.7	5.5	2	+/-20	-40	125	2500	SO8	(C)	-
TLP2261 (Note2)	15	1.6	80	80	2.7	5.5	2	+/-20	-40	125	5000	SO8L	(E)	(Note3)
TLP2361	15	1.6	80	80	2.7	5.5	1	+/-20	-40	125	3750	5pin SO6	(A)	-
TLP2761	15	1.6	80	80	2.7	5.5	1	+/-20	-40	125	5000	SO6L	(D)	✓
TLP2160 (Note2)	20	3.5	55	55	2.7	5.5	5	+/-20	-40	125	2500	SO8	(C)	-
TLP2366	20	3.5	55	55	2.7	5.5	3	+/-20	-40	125	3750	5pin SO6	(A)	-
TLP2466	20	3.5	55	55	2.7	5.5	3	+/-20	-40	125	3750	SO8	(B)	-
TLP2766A ☆	20	3.5	55	55	2.7	5.5	3	+/-20	-40	125	5000	SO6L	(D)	✓
TLP2367	50	4	20	20	2.7	5.5	2.5	+/-25	-40	125	3750	5pin SO6	(F)	-
TLP2767	50	4	20	20	2.7	5.5	2.5	+/-25	-40	125	5000	SO6L	(G)	✓


☆ New Products

Note1: Recommended Operating Condition

Note2: Dual channel version

Note3: This product supports only SO8L(LF4) lead form option.

Pin Configuration

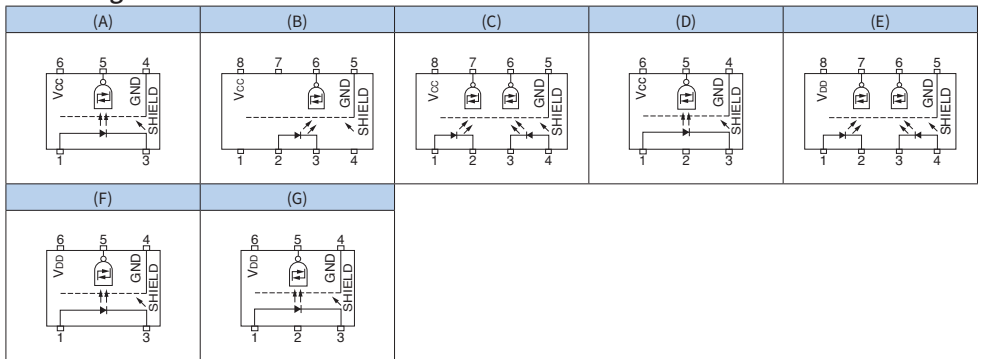

Totem-pole (Buffer) Output Type

Part Number	Data Rate (Mbps)	Threshold LED Input Current I _{FLH} max (mA)	Propagation Delay Time		Supply Voltage Operating Range V _{CC} / V _{DD} (Note1)		High / Low -level Supply Current I _{CC} / I _{DD} max (mA)	Common Mode Transient Immunity CM min (kV / μs)	Operating Temperature		Isolation Voltage BV _s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
									T _{opr}					
			t _{pLH} max (ns)	t _{pHL} max (ns)	min (V)	max (V)	min (°C)	max (°C)						
TLP2110 (Note2)	5	1	250	250	2.7	5.5	0.6	+/-25	-40	125	2500	SO8	(A)	-
TLP2310	5	1	250	250	2.7	5.5	0.3	+/-25	-40	125	3750	5pin SO6	(B)	-
TLP2210 (Note2)	5	1.3	250	250	2.7	5.5	0.6	+/-25	-40	125	5000	SO8L	(A)	(Note3)
TLP2312 ☆	5	1.6	250	250	2.2	5.5	0.5	+/-20	-40	125	3750	5pin SO6	(B)	-
TLP2710 ☆	5	1	250	250	2.7	5.5	0.3	+/-25	-40	125	5000	SO6L	(C)	✓
TLP2355	5	1.6	250	250	3	20	3	+/-20	-40	125	3750	5pin SO6	(D)	-
TLP2105 (Note2)	5	1.6	250	250	4.5	20	6	+/-10	-40	100	2500	SO8	(F)	-
TLP2405	5	1.6	250	250	4.5	20	3	+/-15	-40	100	3750	SO8	(E)	-
TLP2345	10	1.6	120	120	4.5	30	3	+/-30	-40	110	3750	5pin SO6	(D)	-
TLP2745	10	1.6	120	120	4.5	30	3	+/-30	-40	110	5000	SO6L	(G)	✓
TLP2735	10	3	100	100	9	15	4.5	+/-25	-40	125	5000	SO6L	(C)	-
TLP2270 (Note2)	20	1	60	60	2.7	5.5	0.8	+/-20	-40	125	5000	SO8L	(A)	(Note3)
TLP2370	20	1	60	60	2.7	5.5	0.4	+/-20	-40	125	3750	5pin SO6	(B)	-
TLP2770	20	1	60	60	2.7	5.5	0.4	+/-20	-40	125	5000	SO6L	(C)	-
TLP2372 ☆	20	1.6	75	75	2.2	5.5	0.5	+/-20	-40	125	3750	5pin SO6	(B)	-


☆ New Products

Note1: Recommended Operating Condition

Note2: Dual channel version

Note3: This product supports only SO8(LF4) lead form option.

Pin Configuration

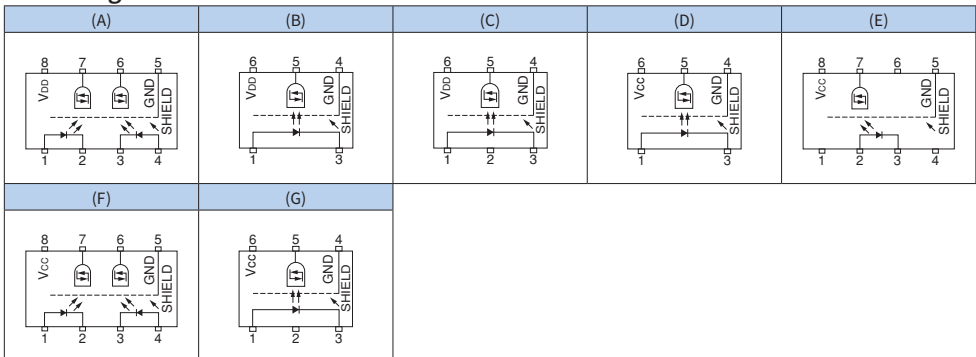

AC Input Type

Totem-pole (Inverter) Output Type


Part Number	Data Rate (Mbps)	Threshold LED Input Current I _{FHL} max (mA)	Propagation Delay Time		Supply Voltage Operating Range V _{CC} (Note1)		High / Low-level Supply Current I _{CC} max (mA)	Common Mode Transient Immunity CM min (kV / μs)	Operating Temperature		Isolation Voltage BV _s min (Vrms)	Toshiba Package 5pin SO6	Pin Configuration (A)	Lead Form Option -
									T _{opr}					
			min (°C)	max (°C)	t _{pLH} max (ns)	t _{pHL} max (ns)			min (V)	max (V)				
TLP2398	5	2.3	250	250	3	20	3	+/-20	-40	125	3750	5pin SO6	(A)	-
TLP2391	10	2.5	100	100	2.7	5.5	1	+/-20	-40	125	3750	5pin SO6	(A)	-

Totem-pole (Buffer) Output Type

Part Number	Data Rate (Mbps)	Threshold LED Input Current I _{FLH} max (mA)	Propagation Delay Time		Supply Voltage Operating Range V _{CC} (Note1)		High / Low-level Supply Current I _{CC} max (mA)	Common Mode Transient Immunity CM min (kV / μs)	Operating Temperature		Isolation Voltage BV _s min (Vrms)	Toshiba Package 5pin SO6	Pin Configuration (B)	Lead Form Option -
									T _{opr}					
			min (°C)	max (°C)	t _{pLH} max (ns)	t _{pHL} max (ns)			min (V)	max (V)				
TLP2395	5	2.3	250	250	3	20	3	+/-20	-40	125	3750	5pin SO6	(B)	-

Note1: Recommended Operating Condition

Pin Configuration

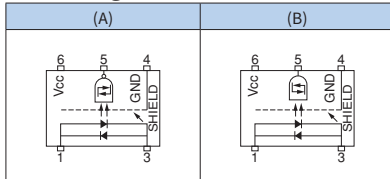

■ IPM Driver

Open-collector Output Type

Part Number	Data Rate (Mbps)	Threshold LED Input Current IfHL max (mA)	Propagation Delay Time tpLH max (ns) / tpHL max (ns)		Supply Voltage Operating Range Vcc (Note1)		High / Low-level Supply Current Icc max (mA)	Common Mode Transient Immunity CM min (kV / μs)	Operating Temperature Topr		Isolation Voltage BV _s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
					min (V)	max (V)			min (°C)	max (°C)				
					TLP104	1			5	550				
TLP2304 ☆	1	5	550	400	4.5	30	1.3	+/-20	-40	125	3750	5pin SO6	(A)	-
TLP2404	1	5	550	400	4.5	30	1.3	+/-15	-40	125	3750	SO8	(B)	-
TLP2704	1	5	550	400	4.5	30	1.3	+/-20	-40	125	5000	SO6L	(C)	✓

Totem-pole (Inverter) Output Type

Part Number	Data Rate (Mbps)	Threshold LED Input Current IfHL max (mA)	Propagation Delay Time tpLH max (ns) / tpHL max (ns)		Supply Voltage Operating Range Vcc (Note1)		High / Low-level Supply Current Icc max (mA)	Common Mode Transient Immunity CM min (kV / μs)	Operating Temperature Topr		Isolation Voltage BV _s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
					min (V)	max (V)			min (°C)	max (°C)				
					TLP2358	5			1.6	250				
TLP2408	5	1.6	250	250	4.5	20	3	+/-15	-40	100	3750	SO8	(E)	-
TLP2348	10	1.6	120	120	4.5	30	3	+/-30	-40	110	3750	5pin SO6	(D)	-
TLP2748	10	1.6	120	120	4.5	30	3	+/-30	-40	110	5000	SO6L	(F)	✓

Totem-pole (Buffer) Output Type

Part Number	Data Rate (Mbps)	Threshold LED Input Current IfHL max (mA)	Propagation Delay Time tpLH max (ns) / tpHL max (ns)		Supply Voltage Operating Range Vcc (Note1)		High / Low-level Supply Current Icc max (mA)	Common Mode Transient Immunity CM min (kV / μs)	Operating Temperature Topr		Isolation Voltage BV _s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
					min (V)	max (V)			min (°C)	max (°C)				
					TLP2355	5			1.6	250				
TLP2405	5	1.6	250	250	4.5	20	3	+/-15	-40	100	3750	SO8	(H)	-
TLP2345	10	1.6	120	120	4.5	30	3	+/-30	-40	110	3750	5pin SO6	(G)	-
TLP2745	10	1.6	120	120	4.5	30	3	+/-30	-40	110	5000	SO6L	(I)	✓
TLP2735	10	3	100	100	9	15	4.5	+/-25	-40	125	5000	SO6L	(I)	-

☆ New Products

Note1: Recommended Operating Condition


Open-collector Output Type

Part Number	Data Rate (Mbps)	Current Transfer Ratio CTR min (%) @Ta=25 °C	Propagation Delay Time		Supply Voltage Operating Range V _{CC} (Note1)		High / Low level Supply Current I _{CC} max (mA)	Common Mode Transient Immunity CM min (kV / μs)	Operating Temperature T _{opr}		Isolation Voltage BV _s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
			t _{pLH} max (ns)	t _{pHL} max (ns)	min (V)	max (V)			min (°C)	max (°C)				
			TLP109 (IGM)	1	25 (@I _F =10 mA)	1000			1000	-				
TLP2409	1	20 (@I _F =16 mA)	800	800	-	30	0.001	+/-5	-55	125	3750	SO8	(K)	-
TLP2719 ☆	1	15 (@I _F =16 mA)	2000	850	4.5	20	0.001	+/-10	-40	100	5000	SO6L	(L)	✓

☆ New Products

Note1: Recommended Operating Condition

Pin Configuration

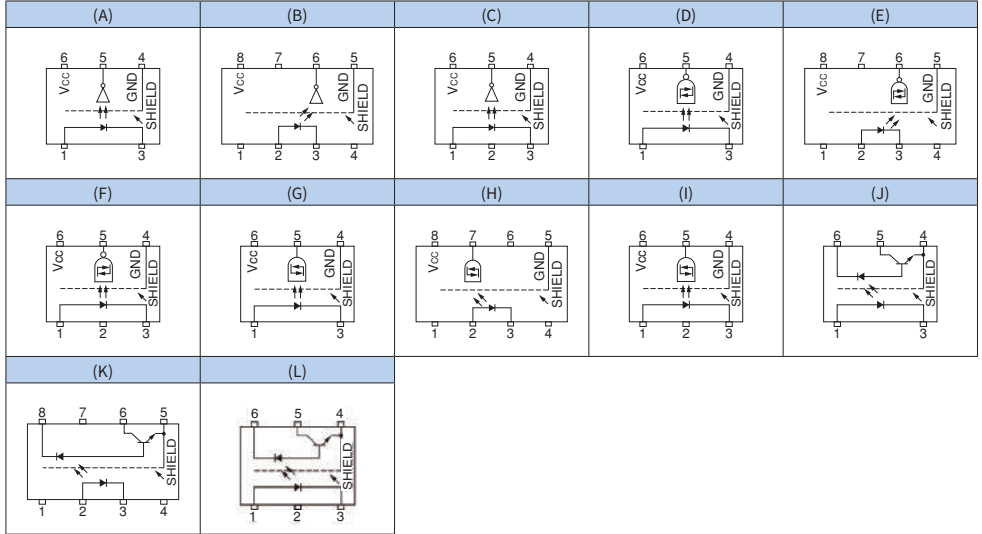

■ IGBT / MOSFET Driver

Totem-pole (Buffer) Output Type


Part Number	Output Current (Note2) I _{OPH} or I _{OPL} max (A)	Threshold LED Input Current I _{FLH} max (mA)	Propagation Delay Time		Supply Voltage Operating Range V _{CC} (Note1)		High / Low-level Supply Current I _{CC} max (mA)	Common Mode Transient Immunity CM min (kV / μs)	Operating Temperature T _{OPR}		Isolation Voltage BV _s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
TLP155E	+/-0.6	7.5	200	200	10	30	3	+/-15	-40	100	3750	5pin SO6	(A)	-
TLP151A	+/-0.6	5	500	500	10	30	2	+/-20	-40	110	3750	5pin SO6	(A)	-
TLP2451A	+/-0.6	5	500	500	10	30	2	+/-20	-40	125	3750	SO8	(B)	-
TLP351A	+/-0.6	5	500	500	10	30	2	+/-20	-40	100	3750	DIP8	(B)	✓
TLP5701	+/-0.6	5	500	500	10	30	2	+/-20	-40	110	5000	SO6L	(D)	✓
TLP351H	+/-0.6	5	700	700	10	30	2	+/-20	-40	125	3750	DIP8	(B)	✓
TLP5751	+/-1.0	4	150	150	15	30	3	+/-35	-40	110	5000	SO6L	(E)	✓
TLP5751H ☆	+/-1.0	4	150	150	15	30	3	+/-35	-40	125	5000	SO6L	(E)	✓
TLP5771	+/-1.0	2	150	150	10	30	3	+/-35	-40	110	5000	SO6L	(E)	✓
TLP5771H ☆	+/-1.0	2	150	150	10	30	3	+/-35	-40	125	5000	SO6L	(E)	✓
TLP5752	+/-2.5	4	150	150	15	30	3	+/-35	-40	110	5000	SO6L	(E)	✓
TLP5752H ☆	+/-2.5	4	150	150	15	30	3	+/-35	-40	125	5000	SO6L	(E)	✓
TLP5772	+/-2.5	2	150	150	10	30	3	+/-35	-40	110	5000	SO6L	(E)	✓
TLP5772H ☆	+/-2.5	2	150	150	10	30	3	+/-35	-40	125	5000	SO6L	(E)	✓
TLP152	+/-2.5	7.5	170	190	10	30	3	+/-20	-40	100	3750	5pin SO6	(A)	-
TLP352	+/-2.5	5	200	200	15	30	3	+/-20	-40	125	3750	DIP8	(B)	✓
TLP5702	+/-2.5	5	200	200	15	30	3	+/-20	-40	110	5000	SO6L	(D)	✓
TLP5702H ☆	+/-2.5	5	200	200	15	30	3	+/-50	-40	125	5000	SO6L	(D)	✓
TLP5705H ☆	+/-5.0	5	200	200	15	30	3	+/-50	-40	125	5000	SO6L	(D)	✓
TLP5832 ☆	+/-2.5	5	200	200	15	30	3	+/-20	-40	110	5000	SO8L	(F)	-
TLP250H	+/-2.5	5	500	500	10	30	3	+/-40	-40	125	3750	DIP8	(B)	✓
TLP350H	+/-2.5	5	500	500	15	30	3	+/-20	-40	125	3750	DIP8	(B)	✓
TLP5754	+/-4.0	4	150	150	15	30	3	+/-35	-40	110	5000	SO6L	(E)	✓
TLP5754H ☆	+/-4.0	4	150	150	15	30	3	+/-35	-40	125	5000	SO6L	(E)	✓
TLP5774	+/-4.0	2	150	150	10	30	3	+/-35	-40	110	5000	SO6L	(E)	✓
TLP5774H ☆	+/-4.0	2	150	150	10	30	3	+/-35	-40	125	5000	SO6L	(E)	✓
TLP358H	+/-6.0	5	500	500	15	30	2	+/-20	-40	125	3750	DIP8	(C)	✓

☆ New Products

Note1: Recommended Operating Condition

Note2: Absolute Maximum Ratings

Pin Configuration

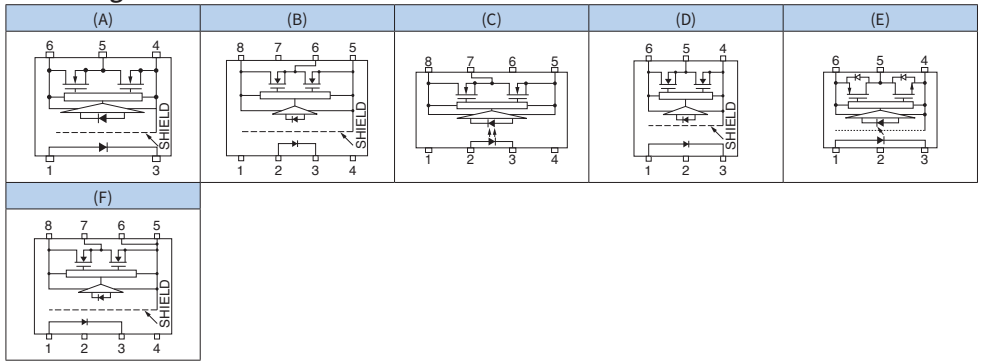

Smart Gate Driver

Part Number	Output Current (Note2)	Threshold LED Input Current	Propagation Delay Time		Supply Voltage Operating Range		High / Low-level Supply Current	Common Mode Transient Immunity	Operating Temperature		Isolation Voltage	Toshiba Package	Pin Configuration
									I _{OPH} or I _{OPL} max (A)	I _{FLH} max (mA)			
TLP5214A	+/-4.0	6	150	150	15	30	3.8	+/-35	-40	110	5000	SO16L	(A)
<ul style="list-style-type: none"> • Rail to rail output • Active miller clamp • DESAT / UVLO protection and failure feedback 													
TLP5212 ☆	+/-4.0	6	150	150	15	30	3.8	+/-35	-40	110	5000	SO16L	(A)
<ul style="list-style-type: none"> • Non-rail to rail output • Active miller clamp • DESAT / UVLO protection and failure feedback 													
TLP5231 ☆	+/-2.5	3.5 (I _{FLH})	300	300	21.5	30	10.2	+/-25	-40	110	5000	SO16L	(B)
<ul style="list-style-type: none"> • High current IGBT / MOSFET Pre-drive Coupler • Rail to rail output • Overlap control for MOSFET buffer • Over current / UVLO protection and failure feedback 													

☆ New Products

Note1: Recommended Operating Condition

Note2: Absolute Maximum Ratings

Pin Configuration

(A)				(B)			
1	V _S	V _E	16	1	N. C.	V _E	16
2	V _{CC1}	V _{LED}	15	2	CATHODE	DESAT	15
3	FAULT	DESAT	14	3	ANODE	V _{GMOS}	14
4	V _S	V _{CC2}	13	4	CATHODE	V _{CC2}	13
5	CATHODE	V _{EE}	12	5	V _{GN01}	V _{OUTP}	12
6	ANODE	V _{OUT}	11	6	V _{CC1}	V _{OUTN}	11
7	ANODE	V _{CLAMP}	10	7	FAULT	V _{LED}	10
8	CATHODE	V _{EE}	9	8	V _{GN01}	V _{EE}	9

■ Isolation Amplifiers / Delta-Sigma Modulators

Analog Output

Part Number	Supply Voltage V_{DD1} (V) V_{DD2} (V) (Note1)	Supply Current max I_{DD1} (mA) I_{DD2} (mA)	Common Mode Transient Immunity CMTI typ. (kV / μ s)	V_{OUT} Non-linearity NL ₂₀₀ typ. (%)	Gain G typ. @ $T_a=25^\circ\text{C}$ (V / V)	Operating Temperature T_{opr}		Isolation Voltage BV_s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
						min (°C)	max (°C)				
TLP7820	4.5 to 5.5 3.0 to 5.5	12 10	20	0.02	8.2	-40	105	5000	SO8L	(A)	(Note2)
TLP7920	4.5 to 5.5 3.0 to 5.5	12 10	20	0.02	8.2	-40	105	5000	DIP8	(A)	✓


Digital Output

Part Number	Supply Voltage V_{DD1} (V) V_{DD2} (V) (Note1)	Supply Current max I_{DD1} (mA) I_{DD2} (mA)	Common Mode Transient Immunity CMTI typ. (kV / μ s)	V_{OUT} Non-linearity INL @ $T_a=-40$ to 85°C (LSB)	Gain Error G_E typ. @ $T_a=25^\circ\text{C}$ (%)	Operating Temperature T_{opr}		Isolation Voltage BV_s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
						min (°C)	max (°C)				
TLP7830	4.5 to 5.5 3.0 to 5.5	12 8	20	-15 to 15	0.1	-40	105	5000	SO8L	(B)	(Note2)
TLP7930	4.5 to 5.5 3.0 to 5.5	12 8	20	-15 to 15	0.1	-40	105	5000	DIP8	(B)	✓

Note1: Recommended Operating Condition


Note2: This product supports only SO8L(LF4) lead form option.

Pin Configuration

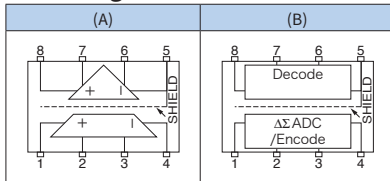

D-IGBT, MOSFET based AC-Servo Amp / Inverter

Block diagram of Inverter

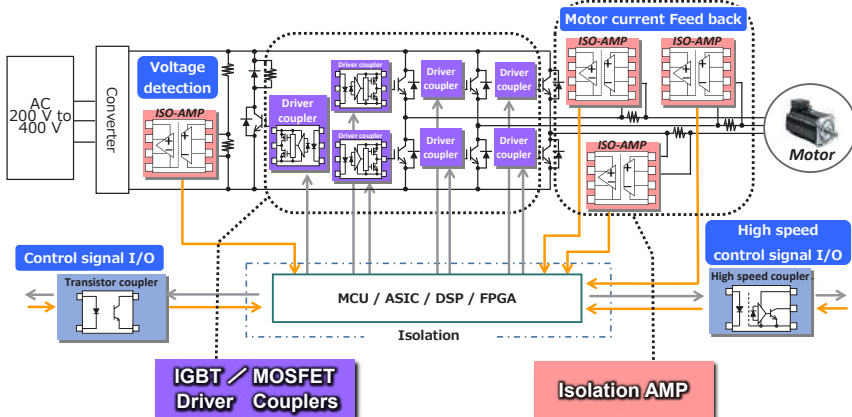

1-1-2 Transistor Output

Part Number	Input Type	Function	Current Transfer Ratio			Collector-Emitter Voltage V _{CEO} max (V)	Collector Current I _c max (A)	Operating Temperature		Isolation Voltage BV _s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
			CTR (I _c / I _f) @Ta=25 °C					T _{opr}					
			min (%)	max (%)	Relevant Part	min (°C)	max (°C)						
TLP185(SE)	DC	General-purpose	50	600	☆1	80	0.05	-55	110	3750	4pin SO6	(A)	-
TLP291(SE)			50	600	☆1	80	0.05	-55	110	3750	SO4	(B)	-
TLP291-4 (Note1)			50	400	☆3	80	0.05	-55	110	2500	SO16	(C)	-
TLP385			50	600	☆1	80	0.05	-55	110	5000	4pin SO6L	(A)	-
TLP785			50	600	☆1	80	0.05	-55	110	5000	DIP4 (TLP785)	(B)	✓
TLP183		Low I _f	50	600	☆1	80	0.05	-55	125	3750	4pin SO6	(A)	-
TLP293-4 (Note1)			50	600	☆4	80	0.05	-55	125	3750	SO16	(C)	-
TLP293			50	600	☆1	80	0.05	-55	125	3750	SO4	(B)	-
TLP383			50	600	☆3	80	0.05	-55	125	5000	4pin SO6L	(A)	-
TLP188		High V _{CEO}	50	600	☆3	350	0.05	-55	110	3750	4pin SO6	(A)	-
TLP388			50	600	☆3	350	0.05	-55	125	5000	4pin SO6L	(A)	-
TLP628M ☆			50	600	☆3	350	0.05	-55	125	5000	DIP4	(B)	✓
TLP184(SE)			AC	General-purpose	50	600	☆2	80	0.05	-55	110	3750	4pin SO6
TLP290(SE)	50	600			☆2	80	0.05	-55	110	3750	SO4	(E)	-
TLP290-4 (Note1)	50	400		☆3	80	0.05	-55	110	2500	SO16	(F)	-	
TLP182	Low I _f	50		600	☆2	80	0.05	-55	125	3750	4pin SO6	(D)	-
TLP292-4 (Note1)		50		600	☆4	80	0.05	-55	125	3750	SO16	(F)	-
TLP292		50		600	☆2	80	0.05	-55	125	3750	SO4	(E)	-
TLP620M ☆	50	600		☆2	80	0.05	-55	125	5000	DIP4	(E)	✓	
TLP187	DC	Darlington	1000	-	-	300	0.15	-55	110	3750	4pin SO6	(G)	-
TLP387			1000	-	-	300	0.15	-55	110	5000	4pin SO6L	(G)	-
TLP627M ☆			1000	-	-	300	0.15	-55	110	5000	DIP4	(H)	✓
TLP295-4 (Note1) ☆		AC	Low I _f / High Speed	100	700	-	80	0.05	-55	125	3750	SO16	(I)
TLP294-4 (Note1) ☆	100			700	-	80	0.05	-55	125	3750	SO16	(I)	-

Current Transfer Ratio Rank

Rank		Selectable Rank										General
		Y	GR	GB	BL	YH	GRL	GRH	BLL	LA	LGB	Blank
Current Transfer Ratio (%)	min	50	100	100	200	75	100	150	200	50	100	50
	max	150	300	600	600 (Note2)	150	200	300	400	600	600	600 (Note2)
Relevant Part	☆1	○	○	○	○	○	○	○	○			○
	☆2	○	○	○	○							○
	☆3			○								○
	☆4			○						○	○	○
Marking of Classification (Note3)		YE, Y+	GR, G, G+	GB, GR, G, G+, BL, B	BL, B	Y+	G	G+	B	LA, LB	LB	Blank, YE, Y+, GR, GB, G, G+, BL, B

☆ New Products

Note1: 4-Channel version

Note2: 400 % (max); TLP290-4, TLP291-4

Note3: Depend on the product variety, the package is not marked some characters in this table.

Pin Configuration

(A)	(B)	(C)	(D)	(E)
(F)	(G)	(H)	(I)	

1-2 Digital Isolators

1-2-1 Standard Digital Isolators


Part Number	Number of channels Forward: Reverse	Default output logic	Enabled/Disabled control	Propagation Delay	Supply Voltage Operating Range		Operating Temperature		Isolation Voltage	Toshiba Package	Pin Configuration	Lead Form Option
				t_{PLH} / t_{PHL} (Note1)	V_{DD} (Note2)		T_{opr}					
				max (ns)	min (V)	max (V)	min (°C)	max (°C)	BV_s min (Vrms)			
DCL540C01 ★	4:0	Low	without	21	2.25	5.5	-40	110	5000	SOIC16-W	(A)	-
DCL540D01 ★	4:0	High	without	21	2.25	5.5	-40	110	5000	SOIC16-W	(A)	-
DCL540L01 ★	4:0	Low	Output Enable	21	2.25	5.5	-40	110	5000	SOIC16-W	(B)	-
DCL540H01 ★	4:0	High	Output Enable	21	2.25	5.5	-40	110	5000	SOIC16-W	(B)	-
DCL541A01 ★	3:1	Low	Input Disable	21	2.25	5.5	-40	110	5000	SOIC16-W	(C)	-
DCL541B01 ★	3:1	High	Input Disable	21	2.25	5.5	-40	110	5000	SOIC16-W	(C)	-

★ Under Development (The specification is subject to change without notice.)

Note1: $V_{DD}=2.25$ to 2.75 V, $T_{opr}=-40$ to 110 °C

Note2: Recommended Operating Condition

Pin Configuration

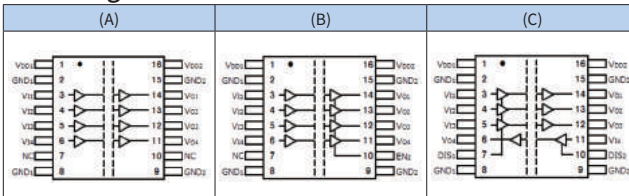

2. Solid State Relays

2-1 Photorelays

■ MOSFET Output 1-Form-A

Part Number	OFF-state Output Terminal Voltage V _{OFF} max (V)	ON-state Current I _{ON} max (A)	Terminal Capacitance C _{OFF} typ. (pF)	ON-state Resistance R _{ON} max (Ω)	Trigger LED Current I _{FT} max (mA)	Operating Temperature		Isolation Voltage BV _s min (V _{rms})	Toshiba Package	Pin Configuration	Lead Form Option
						T _{opr}					
						min (°C)	max (°C)				
TLP3100	20	2.5	1000	0.05	3	-40	85	1500	2.54SOP6	(C)	-
TLP3146	30	3.3	450	0.05	3	-40	110	1500	2.54SOP4	(A)	-
TLP3553A	30	4	450	0.05	3	-40	110	2500	DIP4	(A)	✓
TLP3106A	30	4.5	1200	0.03	3	-40	110	1500	2.54SOP6	(C)	-
TLP3543A	30	5	1100	0.04	3	-40	110	2500	DIP6	(C)	✓
TLP3123	40	1	300	0.13	3	-40	85	1500	2.54SOP4	(A)	-
TLP241A	40	2	300	0.15	3	-40	85	5000	DIP4	(A)	✓
TLP3554	40	2.5	300	0.15	3	-40	85	2500	DIP4	(A)	✓
TLP3102	40	2.5	1000	0.06	3	-40	85	1500	2.54SOP6	(C)	-
TLP3544	40	3.5	1000	0.06	3	-40	85	2500	DIP6	(C)	✓
TLP175A	60	0.1	10	50	1	-40	85	3750	4pin SO6	(B)	-
TLP170A	60	0.4	130	2	1	-40	85	1500	2.54SOP4	(A)	-
TLP171A	60	0.4	130	2	0.2	-40	85	1500	2.54SOP4	(A)	-
TLP192A	60	0.4	130	2	3	-40	85	1500	2.54SOP6	(C)	-
TLP240A	60	0.5	130	2	3	-40	85	5000	DIP4	(A)	✓
TLP170AM ☆	60	0.7	100	0.3	1	-40	85	3750	4pin SO6	(B)	-
TLP176AM	60	0.7	100	2	3	-40	110	3750	4pin SO6	(B)	-
TLP3122A	60	1.4	100	0.25	3	-40	110	3750	4pin SO6	(B)	-
TLP3127	60	1.7	250	0.13	3	-40	85	1500	2.54SOP4	(A)	-
TLP3103	60	2.3	1000	0.07	3	-40	85	1500	2.54SOP6	(C)	-
TLP3147	60	2.5	240	0.1	3	-40	110	1500	2.54SOP4	(A)	-
TLP3555A	60	3	250	0.1	3	-40	110	2500	DIP4	(A)	✓
TLP3545A	60	4	640	0.06	3	-40	110	2500	DIP6	(C)	✓
TLP3107A	60	4	750	0.04	3	-40	110	1500	2.54SOP6	(C)	-
TLP3547	60	5	850	0.05	5	-40	85	2500	DIP8	(D)	✓
TLP3105	100	1.4	1000	0.2	3	-40	85	1500	2.54SOP6	(C)	-
TLP3149	100	1.5	160	0.2	3	-40	110	1500	2.54SOP4	(A)	-
TLP3556A	100	2	110	0.2	3	-40	110	2500	DIP4	(A)	✓
TLP241B ☆	100	2	300	0.2	3	-40	110	5000	DIP4	(A)	✓
TLP3109A	100	3	460	0.065	3	-40	110	1500	2.54SOP6	(C)	-
TLP3823	100	3	720	0.15	5	-40	110	2500	DIP8	(D)	✓
TLP3546A	100	3.5	450	0.08	3	-40	110	2500	DIP6	(C)	✓
TLP179D	200	0.05	15	50	3	-40	85	1500	2.54SOP4	(A)	-
TLP199D	200	0.05	15	50	3	-40	85	1500	2.54SOP6	(C)	-
TLP170D	200	0.2	90	8	1	-40	85	1500	2.54SOP4	(A)	-
TLP171D	200	0.2	90	8	0.2	-40	85	1500	2.54SOP4	(A)	-


☆ New Products

MOSFET Output 1-Form-A

Part Number	OFF-state Output Terminal Voltage V_{OFF} max (V)	ON-state Current I_{ON} max (A)	Terminal Capacitance C_{OFF} typ. (pF)	ON-state Resistance R_{ON} max (Ω)	Trigger LED Current I_{FT} max (mA)	Operating Temperature		Isolation Voltage BVs min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
						T_{opr}					
						min ($^{\circ}$ C)	max ($^{\circ}$ C)				
TLP176D	200	0.2	100	8	3	-40	85	1500	2.54SOP4	(A)	-
TLP240D	200	0.25	80	8	3	-40	85	5000	DIP4	(A)	✓
TLP3145	200	0.4	100	2	3	-40	110	1500	2.54SOP4	(A)	-
TLP3558A	200	0.7	110	2	3	-40	110	2500	DIP4	(A)	✓
TLP3825	200	1.5	400	0.5	5	-40	110	2500	DIP8	(D)	✓
TLP240G	350	0.1	30	50	3	-40	85	5000	DIP4	(A)	✓
TLP170G	350	0.1	35	50	1	-40	85	1500	2.54SOP4	(A)	-
TLP170GM ☆	350	0.11	30	50	1	-40	85	3750	4pin SO6	(B)	-
TLP172GM	350	0.11	30	50	3	-40	110	3750	4pin SO6	(B)	-
TLP192G	350	0.11	30	50	3	-40	85	1500	2.54SOP6	(C)	-
TLP197G	350	0.12	40	40	3	-40	85	1500	2.54SOP6	(C)	-
TLP224G	350	0.12	40	35	3	-40	85	2500	DIP4	(A)	✓
TLP174G	350	0.12	70	35	3	-40	85	1500	2.54SOP4	(A)	-
TLP171GA	400	0.1	70	35	0.2	-40	85	1500	2.54SOP4	(A)	-
TLP172GAM	400	0.11	30	65	3	-40	110	3750	4pin SO6	(B)	-
TLP797GA	400	0.12	70	40	3	-40	85	5000	DIP6	(C)	✓
TLP224GA	400	0.12	70	35	3	-40	85	2500	DIP4	(A)	✓
TLP174GA	400	0.12	70	35	3	-40	85	1500	2.54SOP4	(A)	-
TLP176GA	400	0.12	70	35	3	-40	85	1500	2.54SOP4	(A)	-
TLP197GA	400	0.12	70	35	3	-40	85	1500	2.54SOP6	(C)	-
TLP223GA ☆	400	0.12	53	35	2	-40	110	5000	DIP4	(A)	✓
TLP240GA	400	0.12	80	35	3	-40	85	5000	DIP4	(A)	✓
TLP598GA	400	0.15	-	12	3	-40	85	2500	DIP6	(C)	✓
TLP798GA	400	0.15	-	12	5	-40	85	5000	DIP6	(C)	✓
TLP3125	400	0.2	410	4	3	-40	85	1500	2.54SOP8	(D)	-
TLP3548	400	0.4	410	5	1	-40	85	2500	DIP8	(D)	✓
TLP171J	600	0.07	75	60	0.2	-40	85	1500	2.54SOP4	(A)	-
TLP170J	600	0.09	75	60	1	-40	85	1500	2.54SOP4	(A)	-
TLP223J ☆	600	0.09	53	60	2	-40	110	5000	DIP4	(A)	✓
TLP240J	600	0.09	75	60	3	-40	85	5000	DIP4	(A)	✓
TLP797J	600	0.1	120	45	5	-40	85	5000	DIP6	(C)	✓
TLP3549	600	0.6	4300	2	5	-40	85	2500	DIP8	(D)	✓

☆ New Products

Pin Configuration

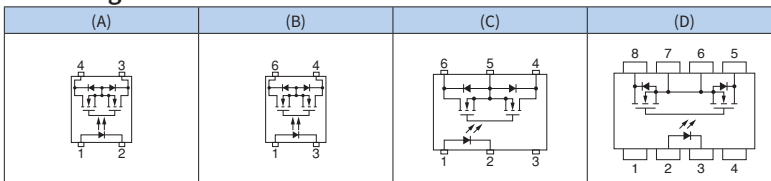

Part Number	OFF-state Output Terminal Voltage V _{OFF} max (V)	ON-state Current I _{ON} max (A)	Terminal Capacitance C _{OFF} typ. (pF)	ON-state Resistance R _{ON} max (Ω)	Trigger LED Current I _{FT} max (mA)	Operating Temperature		Isolation Voltage BV _s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
						T _{opr}					
						min (°C)	max (°C)				
TLP3230	20	0.16	1	8	4	-20	85	1500	SSOP4	(A)	-
TLP3330	20	0.16	1	8	3	-40	85	1000	USOP4	(A)	-
TLP3250	20	0.2	0.8	5	3	-20	85	1500	SSOP4	(A)	-
TLP3350	20	0.2	0.8	5	3	-40	85	1000	USOP4	(A)	-
TLP3450	20	0.2	0.8	5	3	-40	110	500	VSON4	(A)	-
TLP3231	20	0.45	5	1.2	4	-20	85	1500	SSOP4	(A)	-
TLP3431	20	0.45	5	1.2	3	-40	110	500	VSON4	(A)	-
TLP3203	20	0.9	40	0.22	3	-20	85	1500	SSOP4	(A)	-
TLP3303	20	0.9	40	0.22	3	-40	85	1000	USOP4	(A)	-
TLP3403	20	1	40	0.22	3	-40	110	500	VSON4	(A)	-
TLP3406S	30	1.5	120	0.2	3	-40	110	500	S-VSON4	(A)	-
TLP3480 ☆	30	4.5	450	0.05	3	-40	110	500	P-SON4	(A)	-
TLP3342	40	0.1	0.3	20	3	-40	85	1000	USOP4	(A)	-
TLP3442	40	0.1	0.3	20	3	-40	110	500	VSON4	(A)	-
TLP3240	40	0.12	0.45	14	3	-20	85	1500	SSOP4	(A)	-
TLP3340	40	0.12	0.45	14	3	-40	85	1000	USOP4	(A)	-
TLP3440S	40	0.12	0.45	14	3	-40	110	500	S-VSON4T	(A)	-
TLP3440	40	0.12	0.45	14	3	-40	110	500	VSON4	(A)	-
TLP3216	40	0.12	1	15	4	-20	85	1500	SSOP4	(A)	-
TLP3316	40	0.12	1	15	3	-40	85	1000	USOP4	(A)	-
TLP3241	40	0.14	0.7	10	3	-20	85	1500	SSOP4	(A)	-
TLP3341	40	0.14	0.7	10	3	-40	85	1000	USOP4	(A)	-
TLP3441	40	0.14	0.7	10	3	-40	110	500	VSON4	(A)	-
TLP3214	40	0.25	5	3	4	-20	85	1500	SSOP4	(A)	-
TLP3414	40	0.25	5	3	3	-40	110	500	VSON4	(A)	-
TLP3215	40	0.3	10	1.5	4	-20	85	1500	SSOP4	(A)	-
TLP3315	40	0.3	10	1.5	3	-40	85	1000	USOP4	(A)	-
TLP3275	50	0.3	12	1.5	3	-20	85	1500	SSOP4	(A)	-
TLP3375	50	0.3	12	1.5	3	-40	85	1000	USOP4	(A)	-
TLP3475	50	0.3	12	1.5	3	-40	110	500	VSON4	(A)	-
TLP3351	60	0.12	0.7	15	3	-40	85	1000	USOP4	(A)	-
TLP3451	60	0.12	0.7	15	3	-40	110	500	VSON4	(A)	-
TLP3475S	60	0.4	12	1.5	3	-40	110	500	S-VSON4	(A)	-
TLP3212	60	0.4	20	1.5	5	-20	85	1500	SSOP4	(A)	-
TLP3312	60	0.4	20	1.5	3	-40	85	1000	USOP4	(A)	-
TLP3412	60	0.4	20	1.5	3	-40	110	500	VSON4	(A)	-
TLP3407S	60	1	80	0.3	3	-40	110	500	S-VSON4	(A)	-
TLP3481 ☆	60	3	250	0.1	3	-40	110	500	P-SON4	(A)	-
TLP3306	75	0.4	30	1.5	3	-40	85	1000	USOP4	(A)	-
TLP3217	80	0.12	5	12	5	-20	85	1500	SSOP4	(A)	-
TLP3317	80	0.12	5	12	3	-40	85	1000	USOP4	(A)	-
TLP3417	80	0.12	5	12	3	-40	110	500	VSON4	(A)	-
TLP3319	80	0.2	6.5	8	3	-40	85	1000	USOP4	(A)	-
TLP3419	80	0.2	6.5	8	3	-40	110	500	VSON4	(A)	-

☆ New Products


MOSFET Output 1-Form-A

Part Number	OFF-state Output Terminal Voltage V_{OFF} max (V)	ON-state Current I_{ON} max (A)	Terminal Capacitance C_{OFF} typ. (pF)	ON-state Resistance R_{ON} max (Ω)	Trigger LED Current I_{FT} max (mA)	Operating Temperature		Isolation Voltage BV_s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
						T_{opr}					
						min ($^{\circ}$ C)	max ($^{\circ}$ C)				
TLP3220	100	0.08	6	14	5	-20	85	1500	SSOP4	(A)	-
TLP3320	100	0.1	6	14	3	-40	85	1000	USOP4	(A)	-
TLP3420	100	0.1	6	14	3	-40	110	500	VSON4	(A)	-
TLP3409S	100	0.65	50	0.6	3	-40	110	500	S-VSON4	(A)	-
TLP3482 ☆	100	2	170	0.2	3	-40	110	500	P-SON4	(A)	-
TLP3483 ☆	200	0.35	75	8	3	-40	110	500	P-SON4	(A)	-
TLP3484 ☆	400	0.18	60	35	3	-40	110	500	P-SON4	(A)	-

Part Number	OFF-state Output Terminal Voltage V_{OFF} max (V)	ON-state Current I_{ON} max (A)	Terminal Capacitance C_{OFF} typ. (pF)	ON-state Resistance R_{ON} max (Ω)	Operating Voltage V_{FON} max (V)	Operating Temperature		Isolation Voltage BV_s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
						T_{opr}					
						min ($^{\circ}$ C)	max ($^{\circ}$ C)				
TLP3403R	20	1	40	0.22	3	-40	110	500	VSONR4	(B)	-
TLP3403SRHA ☆	20	1.5	120	0.2	3	-40	125	500	S-VSON4T	(B)	-
TLP3406SRHA ☆	30	0.9	120	0.2	3	-40	110	300	S-VSON16T	(C)	-
TLP3406SRL	30	1.5	120	0.2	1.6	-40	110	500	S-VSON4T	(B)	-
TLP3406SRH	30	1.5	120	0.2	3	-40	110	500	S-VSON4T	(B)	-
TLP3406SRHA ☆	30	1.5	120	0.2	3	-40	125	500	S-VSON4T	(B)	-
TLP3475R ☆	50	0.3	12	1.5	3	-40	110	500	VSONR4	(B)	-
TLP3475SRHA4 ☆	60	0.25	20 (max)	1.5	3	-40	125	300	S-VSON16T	(C)	-
TLP3412SRHA4 ☆	60	0.25	20 (max)	1.5	3	-40	125	300	S-VSON16T	(C)	-
TLP3475SRHA ☆	60	0.4	12	1.5	3	-40	125	500	S-VSON4T	(B)	-
TLP3412R	60	0.4	20	1.5	3	-40	110	500	VSONR4	(B)	-
TLP3412SRA ☆	60	0.4	20 (max)	1.5	3	-40	125	500	S-VSON4T	(B)	-
TLP3412SRH ☆	60	0.4	20 (max)	1.5	3	-40	110	500	S-VSON4T	(B)	-
TLP3412SRHA ☆	60	0.4	20 (max)	1.5	3	-40	125	500	S-VSON4T	(B)	-
TLP3407SRA4 ☆	60	0.6	80	0.3	3	-40	125	300	S-VSON16T	(C)	-
TLP3407SRA ☆	60	1	80	0.3	3	-40	125	500	S-VSON4T	(B)	-
TLP3407SRH ☆	60	1	80	0.3	3	-40	110	500	S-VSON4T	(B)	-
TLP3407SRL ☆	60	1	80	0.3	1.6	-40	110	500	S-VSON4T	(B)	-
TLP3407SR	60	1	80	0.3	3	-40	110	500	S-VSON4T	(B)	-

☆ New Products

Pin Configuration

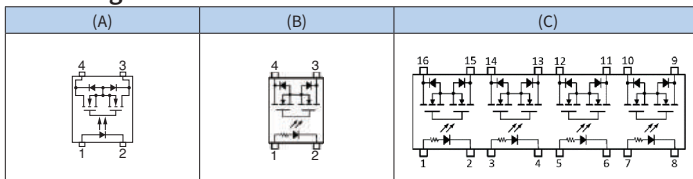


■ MOSFET Output 2-Form-A

Part Number	OFF-state Output Terminal Voltage V_{OFF} max (V)	ON-state Current I_{ON} max (A)	Terminal Capacitance C_{OFF} typ. (pF)	ON-state Resistance R_{ON} max (Ω)	Trigger LED Current I_{FT} max (mA)	Operating Temperature		Isolation Voltage BV_s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
						T_{opr}					
						min ($^{\circ}C$)	max ($^{\circ}C$)				
TLP202A	60	0.4	130	2	3	-40	85	1500	2.54SOP8	(A)	-
TLP200D	200	0.2	100	8	3	-40	85	1500	2.54SOP8	(A)	-
TLP202G	350	0.11	30	50	3	-40	85	1500	2.54SOP8	(A)	-
TLP206G	350	0.12	40	35	3	-40	85	1500	2.54SOP8	(A)	-
TLP224G-2	350	0.12	40	35	3	-40	85	2500	DIP8	(A)	✓
TLP224GA-2	400	0.12	70	35	3	-40	85	2500	DIP8	(A)	✓
TLP206GA	400	0.12	70	35	3	-40	85	1500	2.54SOP8	(A)	-

■ MOSFET Output 1-Form-A / 1-Form-B

Part Number	OFF-state Output Terminal Voltage V_{OFF} max (V)	ON-state Current I_{ON} max (A)	Terminal Capacitance C_{OFF} typ. (pF)	ON-state Resistance R_{ON} max (Ω)	Trigger LED Current I_{FT} / I_{FC} max (mA)	Operating Temperature		Isolation Voltage BV_s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
						T_{opr}					
						min ($^{\circ}C$)	max ($^{\circ}C$)				
TLP4006G	350	0.12	65	25	3	-40	85	2500	DIP8	(B)	✓
TLP4026G	350	0.12	65	25	3	-40	85	1500	2.54SOP8	(B)	-

Pin Configuration

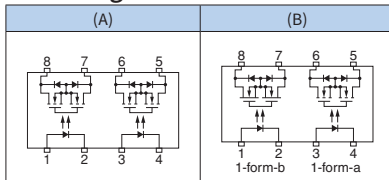

■ MOSFET Output 1-Form-B


Part Number	OFF-state Output Terminal Voltage V_{OFF} max (V)	ON-state Current I_{ON} max (A)	Terminal Capacitance C_{OFF} typ. (pF)	ON-state Resistance R_{ON} max (Ω)	Trigger LED Current I_{FC} max (mA)	Operating Temperature		Isolation Voltage BV_s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
						T_{opr}					
						min ($^{\circ}C$)	max ($^{\circ}C$)				
TLP4176A	60	0.5	100	2.5	3	-40	105	1500	2.54SOP4	(A)	-
TLP4590A ☆	60	1.2	550	0.6	2	-40	110	5000	DIP6	(B)	✓
TLP4176G	350	0.12	65	25	3	-40	85	1500	2.54SOP4	(A)	-
TLP4197G	350	0.12	65	25	3	-40	85	1500	2.54SOP6	(B)	-
TLP4227G	350	0.15	65	25	3	-40	85	2500	DIP4	(A)	✓
TLP4597G	350	0.15	65	25	3	-40	85	2500	DIP6	(B)	✓

■ MOSFET Output 2-Form-B

Part Number	OFF-state Output Terminal Voltage V_{OFF} max (V)	ON-state Current I_{ON} max (A)	Terminal Capacitance C_{OFF} typ. (pF)	ON-state Resistance R_{ON} max (Ω)	Trigger LED Current I_{FC} max (mA)	Operating Temperature		Isolation Voltage BV_s min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
						T_{opr}					
						min ($^{\circ}C$)	max ($^{\circ}C$)				
TLP4206G	350	0.12	65	25	3	-40	85	1500	2.54SOP8	(C)	-
TLP4227G-2	350	0.15	65	25	3	-40	85	2500	DIP8	(C)	✓

☆ New Products

Pin Configuration

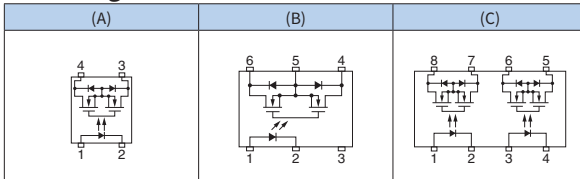


2-2 Photovoltaic Output

Part Number	Feature	Short-circuit current I _{sc} min (μ A)	Open voltage V _{oc} min (V)	Turn-on time t _{on} max (ms)	Turn-off time t _{off} max (ms)	Operating Temperature		Isolation Voltage BV _s min (V _{rms})	Toshiba Package	Pin Configuration	Lead Form Option
						T _{opr}					
						min (°C)	max (°C)				
TLP3905	Without internal shunt resistor	12	7	-	-	-40	125	3750	4pin SO6	(A)	-
TLP3906	Built-in discharging circuit	12	7	1	1	-40	125	3750	4pin SO6	(B)	-
TLP3910 ☆	Built-in discharging circuit	12	14	1	0.5	-40	125	5000	SO6L	(C)	-

☆ New Products

Pin Configuration

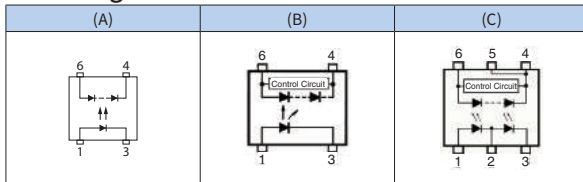


2-3 Triac Output

Part Number	Output Type (Note1)	Trigger LED Current I_{FT} max (mA)	Off-state Output Terminal Voltage V_{DRM} max (V)	On-state RMS Current $I_{T(RMS)}$ max (mA)	Inhibit Voltage V_{IH} max (V)	Peak on-state Voltage V_{TM} max (V)	Operating Temperature		Isolation Voltage BVs min (Vrms)	Toshiba Package	Pin Configuration	Lead Form Option
							T_{opr}					
							min (°C)	max (°C)				
TLP266J	ZC	10	600	70	30	2.8	-40	100	3750	4pin SO6	(A)	-
TLP268J	ZC	3	600	70	30	2.8	-40	100	3750	4pin SO6	(A)	-
TLP3062A	ZC	10	600	100	20	3	-40	100	5000	5pin DIP6	(B)	✓
TLP3064(S)	ZC	3	600	100	50	3	-40	100	5000	5pin DIP6(cut)	(B)	✓
TLP3083	ZC	5	800	100	20	3	-40	100	5000	5pin DIP6	(B)	✓
TLP265J	NZC	10	600	70	-	2.8	-40	100	3750	4pin SO6	(C)	-
TLP267J	NZC	3	600	70	-	2.8	-40	100	3750	4pin SO6	(C)	-
TLP3052A	NZC	10	600	100	-	3	-40	100	5000	5pin DIP6	(D)	✓
TLP3073	NZC	5	800	100	-	3	-40	100	5000	5pin DIP6	(D)	✓

Note1: ZC: Zero crossing functionary, NZC: Non zero crossing functionary

Pin Configuration

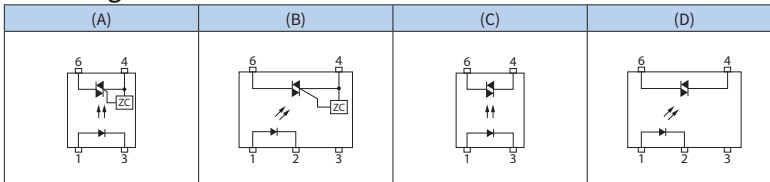

3. Automotive Devices

■ Photocouplers

IC Output

High speed Logic Couplers (Open-collector)

Part Number	Data Rate	Threshold LED Input Current	Propagation Delay Time		Supply Voltage Operating Range		High / Low-level Supply Current	Common Mode Transient Immunity	Operating Temperature		Isolation Voltage	Toshiba Package	Pin Configuration	AEC-Q101
			(Mbps)	I_{FHL} max (mA)	t_{pLH} max (ns)	t_{pHL} max (ns)			min (V)	max (V)				
TLX9304	1	5	550	400	4.5	20	1.3	+/-15	-40	125	3750	5pin SO6	(A)	#
TLX9378	10	5	100	100	4.5	5.5	1.3	+/-15	-40	125	3750	5pin SO6	(C)	#

High speed Logic Couplers (Totem-pole (Buffer))

Part Number	Data Rate	Threshold LED Input Current	Propagation Delay Time		Supply Voltage Operating Range		High / Low-level Supply Current	Common Mode Transient Immunity	Operating Temperature		Isolation Voltage	Toshiba Package	Pin Configuration	AEC-Q101
			(Mbps)	I_{FLH} max (mA)	t_{pLH} max (ns)	t_{pHL} max (ns)			min (V)	max (V)				
TLX9310 ☆	5	1	250	250	2.7	5.5	0.3	+/-25	-40	105	3750	5pin SO6	(D)	#

High speed Logic Couplers (Totem-pole (Inverter))

Part Number	Data Rate	Threshold LED Input Current	Propagation Delay Time		Supply Voltage Operating Range		High / Low-level Supply Current	Common Mode Transient Immunity	Operating Temperature		Isolation Voltage	Toshiba Package	Pin Configuration	AEC-Q101
			(Mbps)	I_{FHL} max (mA)	t_{pLH} max (ns)	t_{pHL} max (ns)			min (V)	max (V)				
TLX9376	20	4	35	35	4.5	5.5	1.7	+/-15	-40	125	3750	5pin SO6	(C)	#

Logic Couplers (Open-collector)

Part Number	Data Rate	Current Transfer Ratio	Propagation Delay Time		Supply Voltage Operating Range		High / Low-level Supply Current	Common Mode Transient Immunity	Operating Temperature		Isolation Voltage	Toshiba Package	Pin Configuration	AEC-Q101
			(Mbps)	CTR min (%) @ $T_a=25^\circ\text{C}$	t_{pLH} max (ns)	t_{pHL} max (ns)			min (V)	max (V)				
TLX9309	1	15 (@ $I_F=7\text{ mA}$)	1000	800	-	30	-	+/-10	-40	125	3750	5pin SO6	(B)	#

Note1: Recommended Operating Condition
 # AEC-Q101 qualified
 ☆ New Products

Transistor Output

Part Number	Input Type	Current Transfer Ratio			Collector-Emitter Voltage V_{ce0} max (V)	Collector Current I_c max (A)	Operating Temperature		Isolation Voltage BV_s min (Vrms)	Toshiba Package	Pin Configuration	AEC-Q101
		CTR (I_c / I_f) @Ta=25 °C					T_{opr}					
		min (%)	max (%)	Relevant Part			min (°C)	max (°C)				
TLX9291A	DC	50	600	☆1	80	0.05	-40 125	3750	SO4	(E)	#	
TLX9185A	DC	50	600	☆1	80	0.05	-40 125	3750	4pin SO6	(E)	#	
TLX9188 ☆	DC	50	600	☆1	200	0.05	-40 125	3750	4pin SO6	(E)	#	
TLX9000	DC	100	900	-	40	0.05	-40 125	3750	SO4	(F)	#	
TLX9300	DC	100	900	-	40	0.05	-40 125	3750	4pin SO6	(F)	#	

☆ New Products

Current Transfer Ratio Rank

Rank	Current Transfer Ratio (%)		Relevant Part	Marking of Classification
	min	max		
Blank	50	600	☆1	Blank, GB
GB	100	600	☆1	GB

Photovoltaic Output

Part Number	Short-circuit Current I_{sc} min (μA) @Ta=25 °C	Open Voltage V_{oc} min (V) @Ta=25 °C	Operating Temperature		Isolation Voltage BV_s min (Vrms)	Toshiba Package	Pin Configuration	AEC-Q101
			T_{opr}					
			min (°C)	max (°C)				
TLX9905 ☆	12	7	-40	125	3750	4pin SO6	(G)	#
TLX9906	12	7	-40	125	3750	4pin SO6	(H)	#

Photorelays


MOSFET Output 1-Form-A

Part Number	OFF-state Output Terminal Voltage V_{OFF} max (V)	ON-state Current I_{ON} max (A)	Terminal Capacitance C_{OFF} typ. (pF)	ON-state Resistance R_{ON} max (Ω)	Trigger LED Current I_{FT} max (mA)	Operating Temperature		Isolation Voltage BV_s min (Vrms)	Toshiba Package	Pin Configuration	AEC-Q101
						T_{opr}					
						min (°C)	max (°C)				
TLX9175J	600	0.015	8	335	3	-55	105	3750	4pin SO6	(I)	#
TLX9160T ☆	1500	0.05	100	250	3	-40	125	5000	SO16L-T	(J)	#

AEC-Q101 qualified




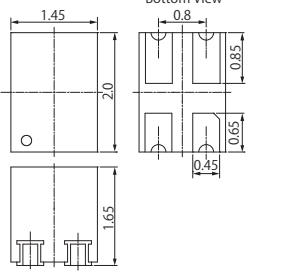

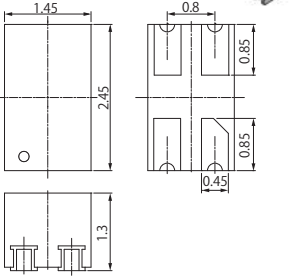



☆ New Products


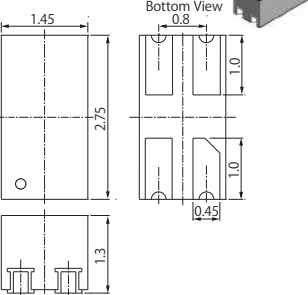

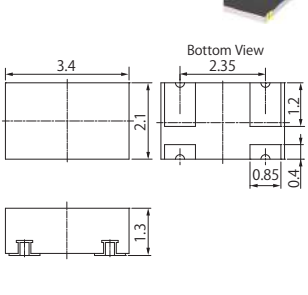

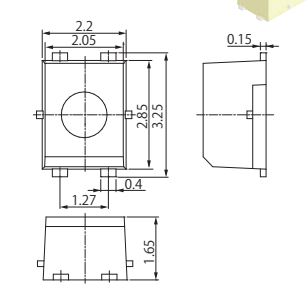

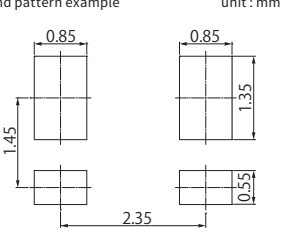

Pin Configuration






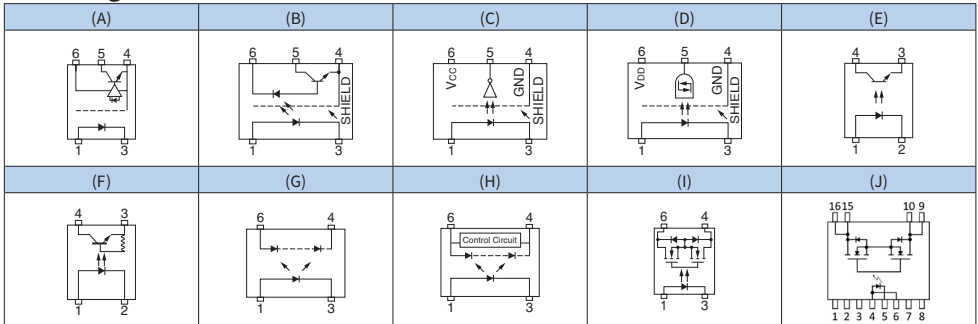








4. Device Packages

■ Dimensional Out Line (Surface Mount Type)

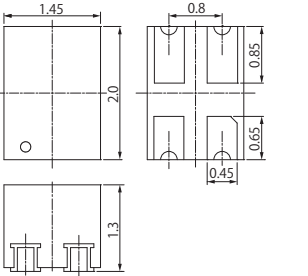S-VSON4T (1.45 x 2.0)	S-VSON4 (1.45 x 2.0)	VSON4 (1.45 x 2.45)
<p>Package dimension unit : mm</p>  <p>Bottom View</p> 	<p>Package dimension unit : mm</p>  <p>Bottom View</p> 	<p>Package dimension unit : mm</p>  <p>Bottom View</p> 
<p>Land pattern example unit : mm</p> 	<p>Land pattern example unit : mm</p> 	<p>Land pattern example unit : mm</p> 


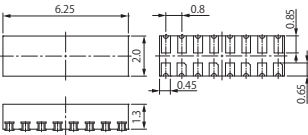

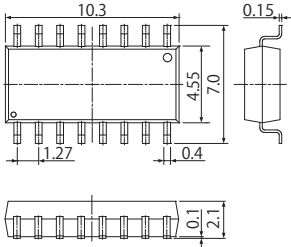

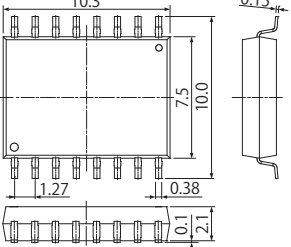
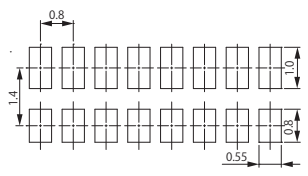
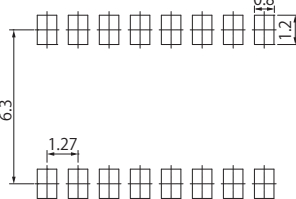
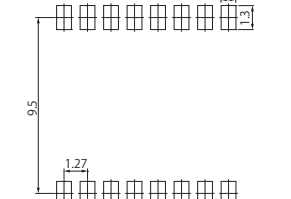
VSONR4 (1.45 x 2.75)	P-SON4 (3.4 x 2.1)	USOP4 (2.2 x 3.25)
<p>Package dimension unit : mm</p>  <p>Bottom View</p> 	<p>Package dimension unit : mm</p>  <p>Bottom View</p> 	<p>Package dimension unit : mm</p>  <p>Bottom View</p> 
<p>Land pattern example unit : mm</p> 	<p>Land pattern example unit : mm</p> 	<p>Land pattern example unit : mm</p> 

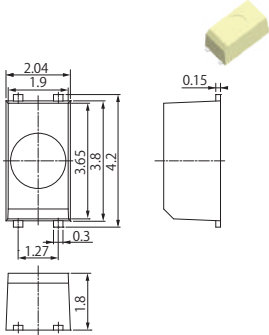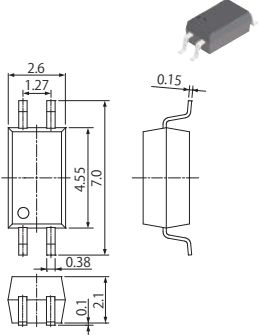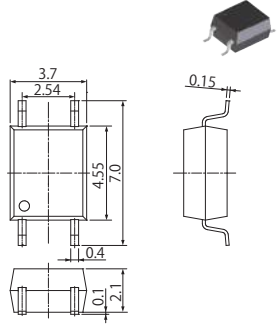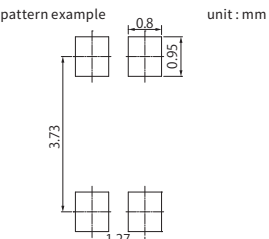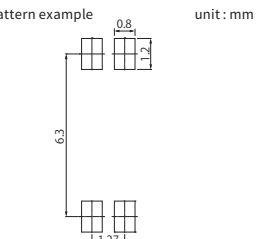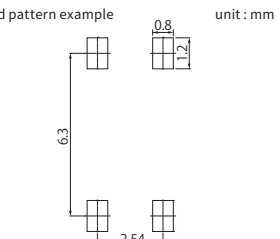
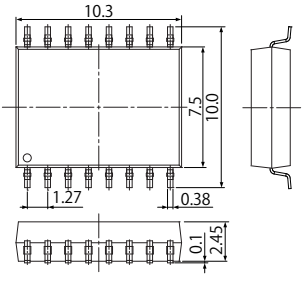
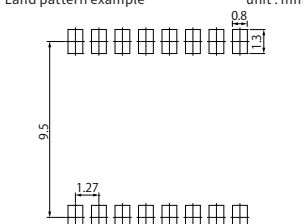
SSOP4 (2.04 x 4.2)	SO4 (2.6 x 7.0)	4pin SO6 (3.7 x 7.0)
<p>Package dimension unit : mm</p> 	<p>Package dimension unit : mm</p> 	<p>Package dimension unit : mm</p> 
<p>Land pattern example unit : mm</p> 	<p>Land pattern example unit : mm</p> 	<p>Land pattern example unit : mm</p> 

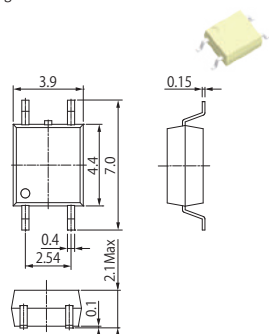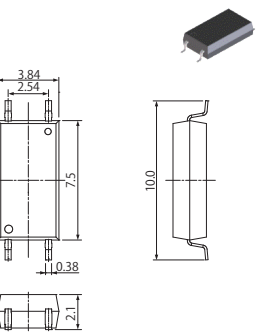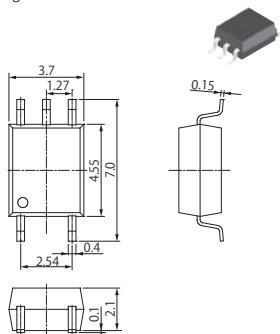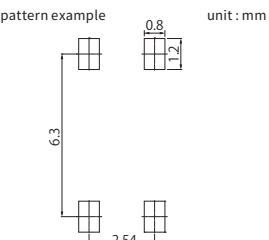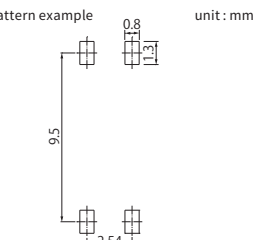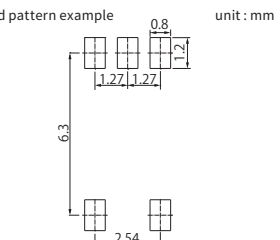2.54SOP4 (3.9 x 7.0)	4pin SO6L (3.84 x 10.0)	5pin SO6 (3.7 x 7.0)
<p>Package dimension unit : mm</p> 	<p>Package dimension unit : mm</p> 	<p>Package dimension unit : mm</p> 
<p>Land pattern example unit : mm</p> 	<p>Land pattern example unit : mm</p> 	<p>Land pattern example unit : mm</p> 





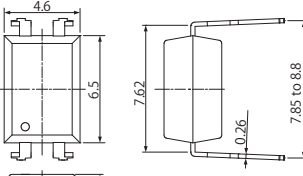


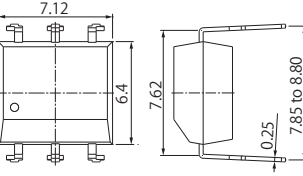

2.54SOP6 (6.3 x 7.0)	SO6L (3.84 x 10.0)	SO8 (5.1 x 6.0)
<p>Package dimension unit : mm</p>	<p>Package dimension unit : mm</p>	<p>Package dimension unit : mm</p>
<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>


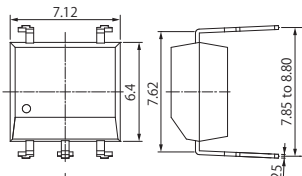


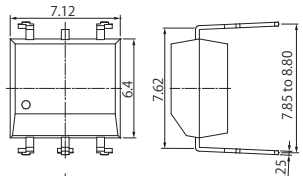


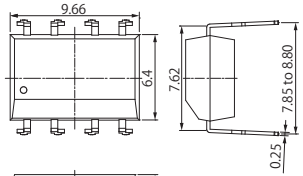

SO8L (5.85 x 10.0)	2.54SOP8 (9.4 x 7.0)	SO16L-T (10.3 x 10.0)
<p>Package dimension unit : mm</p>	<p>Package dimension unit : mm</p>	<p>Package dimension unit : mm</p>
<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>

S-VSON16T (6.25 x 2.0)	SO16 (10.3 x 7.0)	SO16L (10.3 x 10.0)
<p>Package dimension unit : mm</p>  <p>Bottom View</p> 	<p>Package dimension unit : mm</p>  	<p>Package dimension unit : mm</p>  
<p>Land pattern example unit : mm</p> 	<p>Land pattern example unit : mm</p> 	<p>Land pattern example unit : mm</p> 

SOIC16-W (10.3 x 10.0)	
<p>Package dimension unit : mm</p>  	<p>Land pattern example unit : mm</p> 

■ Dimensional Out Line (Through Hole Type)

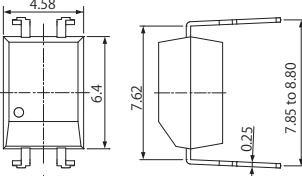DIP4 (4.58 x 7.62)	DIP4 (TLP785) (4.6 x 7.62)	DIP6 (7.12 x 7.62)
<p>Package dimension unit : mm</p>   	<p>Package dimension unit : mm</p>   	<p>Package dimension unit : mm</p>   

5pin DIP6 (7.12 x 7.62)	5pin DIP6 (cut) (7.12 x 7.62)	DIP8 (9.66 x 7.62)
<p>Package dimension unit : mm</p>   	<p>Package dimension unit : mm</p>   	<p>Package dimension unit : mm</p>   

Lead Form Options

DIP4 (LF1) / (TP1) (4.58 x 10.0)	DIP4 (LF5) / (TP5) (4.58 x 10.0)	DIP4 (LF2) (4.58 x 10.16)
<p>Package dimension unit : mm</p>	<p>Package dimension unit : mm</p>	<p>Package dimension unit : mm (DIP4 Ftype)</p>
<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>	
DIP4 (LF4) / (TP4) (4.58 x 12.0)	DIP4 TLP785 (LF6) / (TP6) (4.6 x 10.0)	DIP4 TLP785F (LF7) / (TP7) (4.6 x 11.66)
<p>Package dimension unit : mm</p>	<p>Package dimension unit : mm</p>	<p>Package dimension unit : mm</p>
<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>

DIP6 (LF1) / (TP1) (7.12 x 10.0)	DIP6 (LF5) / (TP5) (7.12 x 10.0)	DIP6 (LF2) (7.12 x 10.16)
<p>Package dimension unit : mm</p>	<p>Package dimension unit : mm</p>	<p>Package dimension unit : mm (DIP6 Ftype)</p>

<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>
---------------------------------------	---------------------------------------	---------------------------------------

DIP6 (LF4) / (TP4) (7.12 x 12.0)	5pin DIP6 (LF1) / (TP1) (7.12 x 10.0)	5pin DIP6 (LF5) / (TP5) (7.12 x 10.0)
<p>Package dimension unit : mm</p>	<p>Package dimension unit : mm</p>	<p>Package dimension unit : mm</p>


<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>
---------------------------------------	---------------------------------------	---------------------------------------

5pin DIP6 (LF2) (7.12 x 10.16)	5pin DIP6 (LF4) / (TP4) (7.12 x 12.0)	5pin DIP6 (cut) (LF1) / (TP1) (7.12 x 10.0)
<p>Package dimension unit : mm</p> <p>(5pin DIP6 FType)</p>	<p>Package dimension unit : mm</p>	<p>Package dimension unit : mm</p>
<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>


5pin DIP6 (cut) (LF5) / (TP5) (7.12 x 10.0)	5pin DIP6 (cut) (LF2) (7.12 x 10.16)	5pin DIP6 (cut) (LF4) / (TP4) (7.12 x 12.0)
<p>Package dimension unit : mm</p>	<p>Package dimension unit : mm</p> <p>(5pin DIP6 (cut) FType)</p>	<p>Package dimension unit : mm</p>
<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>	<p>Land pattern example unit : mm</p>

SO6L (LF4) (3.84 x 11.05)

Package dimension unit : mm



Land pattern example unit : mm



DIP8 (LF1) / (TP1) (9.66 x 10.0)		DIP8 (LF5) / (TP5) (9.66 x 10.0)		DIP8 (LF2) (9.66 x 10.16)	
Package dimension	unit : mm	Package dimension	unit : mm	Package dimension (DIP8 Ftype)	unit : mm

Land pattern example	unit : mm	Land pattern example	unit : mm

DIP8 (LF4) / (TP4) (9.66 x 12.0)		SO8L (LF4) (5.85 x 11.05)	
Package dimension	unit : mm	Package dimension	unit : mm
Land pattern example	unit : mm	Land pattern example	unit : mm

5. Cross Reference

IGBT / MOSFET Driver Photocouplers

Manufacturer	Competitor's Product		Toshiba		
	Part Number	Part Number	Compatible Level (Note:1)	Peak Current	Package
BROADCOM	ACNW3130	TLP352F	3	2.5 A	DIP8
	ACNW3190	TLP358HF	4	6.0 A	DIP8
	ACPL-3130	TLP352	2	2.5 A	DIP8
	ACPL-330J	TLP5214A	2	4.0 A	SO16L
		TLP5212 ☆		2.5 A	
	ACPL-331J	TLP5214A	2	4.0 A	SO16L
		TLP5212 ☆		2.5 A	
	ACPL-332J	TLP5214A	1	4.0 A	SO16L
		TLP5212 ☆		2.5 A	
	ACPL-333J	TLP5214A	2	4.0 A	SO16L
		TLP5212 ☆		2.5 A	
	ACPL-339J	TLP5231 ☆	1	2.0 A	SO16L
	ACPL-H312	TLP5832 ☆	1	2.5 A	SO8L
	ACPL-H342	TLP5772	3	2.5 A	SO6L
	ACPL-J313	TLP352	2	2.5 A	DIP8
	ACPL-K312	TLP5832 ☆	2	2.5 A	SO8L
	ACPL-K342	TLP5772 (LF4)	3	2.5 A	SO6L (LF4)
	ACPL-P302	TLP5701	2	0.6 A	SO6L
	ACPL-P314	TLP5701	2	0.6 A	SO6L
	ACPL-P340	TLP5751	1	1.0 A	SO6L
	ACPL-P341	TLP5754	1	4.0 A	SO6L
	ACPL-P343	TLP5754	1	4.0 A	SO6L
	ACPL-P345	TLP5751	1	1.0 A	SO6L
	ACPL-P346	TLP5752	1	2.5 A	SO6L
	ACPL-P347	TLP5751	2	1.0 A	SO6L
	ACPL-P349	TLP5752	2	2.5 A	SO6L
	ACPL-T350	TLP352	2	2.5 A	DIP8
	ACPL-W302	TLP5701 (LF4)	2	0.6 A	SO6L (LF4)
	ACPL-W314	TLP5701 (LF4)	2	0.6 A	SO6L (LF4)
	ACPL-W340	TLP5751 (LF4)	1	1.0 A	SO6L (LF4)
	ACPL-W341	TLP5754 (LF4)	1	4.0 A	SO6L (LF4)
	ACPL-W343	TLP5754 (LF4)	1	4.0 A	SO6L (LF4)
	ACPL-W345	TLP5751 (LF4)	1	1.0 A	SO6L (LF4)
	ACPL-W346	TLP5752 (LF4)	1	2.5 A	SO6L (LF4)
	ACPL-W347	TLP5751 (LF4)	2	1.0 A	SO6L (LF4)
	ACPL-W349	TLP5752 (LF4)	2	2.5 A	SO6L (LF4)
	HCNW3120	TLP352F	1	2.5 A	DIP8
	HCPL-0302	TLP2451A	2	0.6 A	SO8
	HCPL-0314	TLP2451A	2	0.6 A	SO8
	HCPL-3020	TLP351H	2	0.6 A	DIP8
	HCPL-3120	TLP352	2	2.5 A	DIP8
	HCPL-3140	TLP351H	2	0.6 A	DIP8
HCPL-314J	TLP5701 x 2 pcs	4	0.6 A	SO6L	
HCPL-3150	TLP351H	2	0.6 A	DIP8	
HCPL-315J	TLP5701 x 2 pcs	4	0.6 A	SO6L	

☆ New Products

Note:1

- 1: Package and characteristics are almost same
- 2: Almost same package but similar characteristics
- 3: Almost same characteristics but different package
- 4: Different package and similar characteristics

Manufacturer	Competitor's Product	Toshiba			
	Part Number	Part Number	Compatible Level (Note:1)	Peak Current	Package
	HCPL-316J	TLP5214A	2	4.0 A	SO16L
		TLP5212 ☆		2.5 A	
	HCPL-3180	TLP352	1	2.5 A	DIP8
	HCPL-J312	TLP352	2	2.5 A	DIP8
	HCPL-J314	TLP351H	2	0.6 A	DIP8
	HCPL-T250	TLP352	2	2.5 A	DIP8
Fairchild	FOD3120	TLP352	2	2.5 A	DIP8
	FOD3150	TLP5771	4	1.0 A	SO6L
	FOD3182	TLP5774	4	4.0 A	SO6L
	FOD8314	TLP5772	2	2.5 A	SO6L
	FOD8332	TLP5214A	1	4.0 A	SO16L
TLP5212 ☆		2.5 A			
Renesas	PS9301L	TLP5701	1	0.6 A	SO6L
	PS9302L	TLP5832 ☆	2	2.5 A	SO8L
	PS9305L	TLP5832 ☆	1	2.5 A	SO8L
	PS9307L	TLP5701	1	0.6 A	SO6L
	PS9308L	TLP5702	2	2.5 A	SO6L
	PS9331L	TLP5702	2	2.5 A	SO6L
	PS9402	TLP5214A	2	4.0 A	SO16L
		TLP5212 ☆		2.5 A	
	PS9505	TLP352	2	2.5 A	DIP8
	PS9506	TLP351H	2	0.6 A	DIP8
	PS9531	TLP352	2	2.5 A	DIP8
	PS9552	TLP352	2	2.5 A	DIP8
	PS9553	TLP351H	2	0.6 A	DIP8
	PS9801	TLP2451A	2	0.6 A	SO8
SHARP	PC923	TLP351H	2	0.6 A	DIP8
	PC924	TLP351H	4	0.6 A	DIP8
	PC925	TLP352	2	2.5 A	DIP8
	PC928	TLP5214A	4	4.0 A	SO16L
		TLP5212 ☆		2.5 A	
	PC929	TLP5214A	4	4.0 A	SO16L
TLP5212 ☆		2.5 A			

☆ New Products

Note:1

- 1: Package and characteristics are almost same
- 2: Almost same package but similar characteristics
- 3: Almost same characteristics but different package
- 4: Different package and similar characteristics

High Speed and IPM Driver Photocouplers

Manufacturer	Competitor's Product	Toshiba				
	Part Number	Part Number	Compatible Level (Note:1)	Data Rate (typ.)	Package	
BROADCOM	ACPL-071L	TLP2466	1	20 Mbps	S08	
	ACPL-074L	TLP2160	1	20 Mbps	S08	
	ACPL-M21L	TLP2312	☆	5 Mbps	5pin SO6	
	ACPL-M483	TLP2348	1	10 Mbps	5pin SO6	
	ACPL-M484	TLP2345	1	10 Mbps	5pin SO6	
	ACPL-M60L	TLP2363	☆	1	15 Mbps	5pin SO6
	ACPL-M61L	TLP2361	1	15 Mbps	5pin SO6	
	ACPL-M62L	TLP2363	☆	1	15 Mbps	5pin SO6
	ACPL-M75L	TLP2366	2	20 Mbps	5pin SO6	
	ACPL-K24L	TLP2210	2	20 Mbps	SO8L (LF4)	
	ACPL-P454	TLP2704	2	1 Mbps	SO6L	
	ACPL-P456	TLP2704	1	1 Mbps	SO6L	
	ACPL-P480	TLP2710	☆	2	5 Mbps	SO6L
	ACPL-P481	TLP2710	☆	2	5 Mbps	SO6L
	ACPL-P483	TLP2748	2	10 Mbps	SO6L	
	ACPL-P484	TLP2745	2	10 Mbps	SO6L	
	ACPL-P611	TLP2768A	2	20 Mbps	SO6L	
	ACPL-W21L	TLP2710 (LF4)	☆	2	5 Mbps	SO6L (LF4)
	ACPL-W454	TLP2704 (LF4)	2	1 Mbps	SO6L (LF4)	
	ACPL-W456	TLP2704 (LF4)	1	1 Mbps	SO6L (LF4)	
	ACPL-W480	TLP2710 (LF4)	☆	2	5 Mbps	SO6L (LF4)
	ACPL-W481	TLP2710 (LF4)	☆	2	5 Mbps	SO6L (LF4)
	ACPL-W483	TLP2748 (LF4)	2	10 Mbps	SO6L (LF4)	
	ACPL-W484	TLP2745 (LF4)	2	10 Mbps	SO6L (LF4)	
	ACPL-W50L	TLP2719 (LF4)	☆	2	1 Mbps	SO6L (LF4)
	ACPL-W60L	TLP2768A (LF4)	1	20 Mbps	SO6L (LF4)	
	ACPL-W611	TLP2768A (LF4)	2	20 Mbps	SO6L (LF4)	
	ACPL-W61L	TLP2761 (LF4)	1	15 Mbps	SO6L (LF4)	
	ACPL-W70L	TLP2770	3	20 Mbps	SO6L	
	HCPL-0201	TLP2405	2	5 Mbps	S08	
	HCPL-0211	TLP2405	2	5 Mbps	S08	
	HCPL-0452	TLP2409	2	1 Mbps	S08	
	HCPL-0453	TLP2409	2	1 Mbps	S08	
	HCPL-0454	TLP2404	2	1 Mbps	S08	
	HCPL-0466	TLP2404	2	1 Mbps	S08	
	HCPL-0500	TLP2409	2	1 Mbps	S08	
	HCPL-0501	TLP2409	2	1 Mbps	S08	
	HCPL-0600	TLP2468	2	20 Mbps	S08	
	HCPL-0601	TLP2468	2	20 Mbps	S08	
	HCPL-060L	TLP2468	2	20 Mbps	S08	
	HCPL-0611	TLP2468	2	20 Mbps	S08	
	HCPL-061A	TLP2468	2	20 Mbps	S08	
	HCPL-061N	TLP2468	2	20 Mbps	S08	
	HCPL-0630	TLP2168	2	15 Mbps	S08	
	HCPL-0631	TLP2168	2	15 Mbps	S08	
	HCPL-063A	TLP2261	2	15 Mbps	SO8L	
	HCPL-063L	TLP2168	2	15 Mbps	S08	
	HCPL-063N	TLP2168	2	15 Mbps	S08	
	HCPL-0661	TLP2168	2	15 Mbps	S08	
	HCPL-0700	TLP2403	2	100 kbps	S08	
	HCPL-0701	TLP2403	1	100 kbps	S08	
	HCPL-0708	TLP2468	2	20 Mbps	S08	
	HCPL-070A	TLP2403	1	100 kbps	S08	
	HCPL-070L	TLP2403	2	100 kbps	S08	
	HCPL-0738	TLP2168	2	20 Mbps	S08	
	HCPL-2200	TLP2745	4	10 Mbps	SO6L	
	HCPL-2201	TLP2745	4	10 Mbps	SO6L	
	HCPL-2202	TLP2745	4	10 Mbps	SO6L	
	HCPL-2211	TLP2745	4	10 Mbps	SO6L	
	HCPL-2212	TLP2745	4	10 Mbps	SO6L	
HCPL-2219	TLP2745	4	10 Mbps	SO6L		

☆ New Products

Note:1

- 1: Package and characteristics are almost same
- 2: Almost same package but similar characteristics
- 3: Almost same characteristics but different package
- 4: Different package and similar characteristics

Manufacturer	Competitor's Product		Toshiba		
	Part Number	Part Number	Compatible Level (Note:1)	Data Rate (typ.)	Package
BROADCOM	HCPL-2231	TLP2105	4	5 Mbps	SO8
	HCPL-2232	TLP2105	4	5 Mbps	SO8
	HCPL-2601	TLP2962	2	10 Mbps	DIP8
	HCPL-2611	TLP2962	2	10 Mbps	DIP8
	HCPL-2630	TLP2662	2	10 Mbps	DIP8
	HCPL-2631	TLP2662	2	10 Mbps	DIP8
	HCPL-4502	TLP2719	☆ 3	1 Mbps	SO6L
	HCPL-4503	TLP2719	☆ 3	1 Mbps	SO6L
	HCPL-4504	TLP2719	☆ 3	1 Mbps	SO6L
	HCPL-4506	TLP2704	4	1 Mbps	SO6L
	HCPL-4661	TLP2662	2	10 Mbps	DIP8
	HCPL-M452	TLP2309	2	1 Mbps	5pin SO6
	HCPL-M453	TLP2309	1	1 Mbps	5pin SO6
	HCPL-M454	TLP2309	1	1 Mbps	5pin SO6
	HCPL-M456	TLP2304	☆ 1	1 Mbps	5pin SO6
	HCPL-M600	TLP2363	☆ 1	15 Mbps	5pin SO6
HCPL-M601	TLP2363	☆ 1	15 Mbps	5pin SO6	
HCPL-M611	TLP2363	☆ 1	15 Mbps	5pin SO6	
Renesas	PS8101	TLP2309	3	1 Mbps	5pin SO6
	PS8302L	TLP2704	2	2 Mbps	SO6L
	PS8501	TLP2719	☆ 3	1 Mbps	SO6L
	PS8502	TLP2719	☆ 3	1 Mbps	SO6L
	PS8601	TLP2719	☆ 3	1 Mbps	SO6L
	PS8602	TLP2719	☆ 3	1 Mbps	SO6L
	PS8701	TLP2309	2	1 Mbps	5pin SO6
	PS8802-1	TLP2409	2	1 Mbps	SO8
	PS8802-2	TLP2108	2	5 Mbps	SO8
	PS8821	TLP2409	2	1 Mbps	SO8
	PS9113	TLP104	4	1 Mbps	5pin SO6
	PS9115	TLP2366	2	15 Mbps	5pin SO6
	PS9117A	TLP2361	2	15 Mbps	5pin SO6
	PS9121	TLP2368	2	20 Mbps	5pin SO6
	PS9122	TLP2362	2	10 Mbps	5pin SO6
	PS9123	TLP2366	2	20 Mbps	5pin SO6
	PS9124	TLP2362	2	10 Mbps	5pin SO6
	PS9151	TLP2366	1	20 Mbps	5pin SO6
	PS9213	TLP104	4	1 Mbps	5pin SO6
	PS9214	TLP2362	4	10 Mbps	5pin SO6
	PS9303L	TLP2745	2	10 Mbps	SO6L
	PS9313L	TLP2704	2	2 Mbps	SO6L
	PS9317L	TLP2770	2	20 Mbps	SO6L
	PS9324L	TLP2768A	2	20 Mbps	SO6L
	PS9351L	TLP2770	1	15 Mbps	SO6L
	PS9513	TLP2704	3	1 Mbps	SO6L
	PS9587	TLP2962	2	10 Mbps	DIP8
	PS9617	TLP2962	2	10 Mbps	DIP8
	PS9817A-1	TLP2468	1	20 Mbps	SO8
	PS9817A-2	TLP2168	1	20 Mbps	SO8
	PS9821-1	TLP2468	1	20 Mbps	SO8
	PS9821-2	TLP2168	1	20 Mbps	SO8
	PS9822-1	TLP2404	1	2 Mbps	SO8
	PS9822-2	TLP2108	1	20 Mbps	SO8
	PS9851-1	TLP2366	3	20 Mbps	5pin SO6
	PS9851-2	TLP2160	1	20 Mbps	SO8
SHARP	PC400T	TLP2358	4	100 kbps	5pin SO6
	PC410L	TLP2362	2	10 Mbps	5pin SO6
	PC410S	TLP2468	2	20 Mbps	SO8
	PC411S	TLP2466	2	20 Mbps	SO8
	PC456L	TLP2309	2	1 Mbps	5pin SO6
	PC457L	TLP2309	2	1 Mbps	5pin SO6
	PC457S	TLP2409	2	1 Mbps	SO8
	PC4D10	TLP2168	2	20 Mbps	SO8

☆ New Products

Note:1

- 1: Package and characteristics are almost same
- 2: Almost same package but similar characteristics
- 3: Almost same characteristics but different package
- 4: Different package and similar characteristics

Isolation Amplifiers / Delta-Sigma Modulators

Manufacturer	Competitor's Product	Toshiba				
		Part Number	Compatible Level (Note:1)	Input Feature	Output Feature	Package
BROADCOM	HCPL-7800	TLP7920	2	differential	Analog, Differential	DIP8
	HCPL-7800A	TLP7920	2	differential	Analog, Differential	DIP8
	HCPL-7840	TLP7920	2	differential	Analog, Differential	DIP8
	ACPL-C790	TLP7820	1	differential	Analog, Differential	SO8L(LF4)
	ACPL-C79A	TLP7820	1	differential	Analog, Differential	SO8L(LF4)
	ACPL-C79B	TLP7820	4	differential	Analog, Differential	SO8L(LF4)
	ACPL-7900	TLP7920	2	differential	Analog, Differential	DIP8
	ACPL-790A	TLP7920	2	differential	Analog, Differential	DIP8
	ACPL-790B	TLP7920	2	differential	Analog, Differential	DIP8
	ACPL-C784	TLP7820	1	differential	Analog, Differential	SO8L(LF4)
	ACPL-C780	TLP7820	1	differential	Analog, Differential	SO8L(LF4)
	ACPL-C78A	TLP7820	1	differential	Analog, Differential	SO8L(LF4)
	ACPL-C870	TLP7820	4	differential	Analog, Differential	SO8L(LF4)
	ACPL-C87A	TLP7820	2	differential	Analog, Differential	SO8L(LF4)
	ACPL-C87B	TLP7820	2	differential	Analog, Differential	SO8L(LF4)
	HCPL-7860	TLP7930	2	differential	Digital,Internal CLK	DIP8
	HCPL-786J	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)
	ACPL-C797	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)
	ACPL-7970	TLP7930	2	differential	Digital,Internal CLK	DIP8
	ACPL-796J	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)
ACPL-798J	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)	
TI	AMC1100DWV	TLP7820	2	differential	Analog, Differential	SO8L(LF4)
	AMC1100DUB	TLP7920	2	differential	Analog, Differential	DIP8
	AMC1200BDWV	TLP7820	2	differential	Analog, Differential	SO8L(LF4)
	AMC1200BDUB	TLP7920	2	differential	Analog, Differential	DIP8
	AMC1203PSA	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)
	AMC1203DUB	TLP7930	2	differential	Digital,Internal CLK	DIP8
	AMC1203DW	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)
	AMC1203BPSA	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)
	AMC1203BDUB	TLP7930	2	differential	Digital,Internal CLK	DIP8
	AMC1203BDW	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)
	AMC1204DW	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)
	AMC1204BDWV	TLP7830	2	differential	Digital,Internal CLK	SO8L(LF4)
	AMC1204BDW	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)
	AMC1301	TLP7820	2	differential	Analog, Differential	SO8L(LF4)
	AMC1304	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)
	AMC1305	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)
Analog Devices	AD7400A	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)
	AD7401A	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)
	AD7402	TLP7830	2	differential	Digital,Internal CLK	SO8L(LF4)
	AD7403	TLP7830	2	differential	Digital,Internal CLK	SO8L(LF4)
	AD7405	TLP7830	4	differential	Digital,Internal CLK	SO8L(LF4)
Renesas	PS8551A	TLP7920	2	differential	Analog, Differential	DIP8
	PS9551A	TLP7930	2	differential	Digital,Internal CLK	DIP8

Note:1

- 1: Package and characteristics are almost same
- 2: Almost same package but similar characteristics
- 3: Almost same characteristics but different package
- 4: Different package and similar characteristics

High Speed DIGITAL ISOLATORS

Manufacturer	Competitor's Product	Toshiba								
	Part Number	Part Number	Compatible Level (Note:1)	Total Channels	Reverse Channels	Data Rate [Mbps]	Control signal	Default State	Package	
SiLab	Si8641BA-B-IU	DCL541A01	★	4	4	1	150	input disable	L	SOIC16-W
	Si8641BA-C-IU	DCL541A01	★	4	4	1	150	input disable	L	SOIC16-W
	Si8641BB-B-IS	DCL541A01	★	2	4	1	150	input disable	L	SOIC16-W
	Si8641BB-B-IS1	DCL541A01	★	4	4	1	150	input disable	L	SOIC16-W
	Si8641BB-B-IU	DCL541A01	★	4	4	1	150	input disable	L	SOIC16-W
	Si8641BC-B-IS1	DCL541A01	★	4	4	1	150	input disable	L	SOIC16-W
	Si8641BD-B-IS	DCL541A01	★	2	4	1	150	input disable	L	SOIC16-W
	Si8641BT-IS	DCL541A01	★	2	4	1	150	input disable	L	SOIC16-W
	Si8641BA-C-IU	DCL541A01	★	4	4	1	150	input disable	L	SOIC16-W
	Si8641BD-B-IS2	DCL541A01	★	2	4	1	150	input disable	L	SOIC16-W
	Si8641EC-B-IS1	DCL541B01	★	4	4	1	150	input disable	H	SOIC16-W
	Si8641ED-B-IS	DCL541B01	★	2	4	1	150	input disable	H	SOIC16-W
	Si8641ET-IS	DCL541B01	★	2	4	1	150	input disable	H	SOIC16-W
	Si8641EB-B-IU	DCL541B01	★	4	4	1	150	input disable	H	SOIC16-W
	Si8641ED-B-IS2	DCL541B01	★	2	4	1	150	input disable	H	SOIC16-W
TI	ISO7741FDW	DCL541A01	★	2	4	1	150	input disable	L	SOIC16-W
	ISO7741FBDW	DCL541A01	★	2	4	1	150	input disable	L	SOIC16-W
	ISO7741FDBQ	DCL541A01	★	2	4	1	150	input disable	L	SOIC16-W
	ISO7641FC	DCL541A01	★	2	4	1	150	input disable	H	SOIC16-W
	ISO7641FM	DCL541A01	★	4	4	1	150	input disable	H	SOIC16-W
	ISO7241M	DCL541B01	★	2	4	1	150	input disable	H	SOIC16-W
	ISO7741DW	DCL541B01	★	2	4	1	150	input disable	H	SOIC16-W
	ISO7741BDW	DCL541B01	★	2	4	1	150	input disable	H	SOIC16-W
	ISO7741DBQ	DCL541B01	★	4	4	1	150	input disable	H	SOIC16-W
	ISO7740FDW	DCL540L01	★	1	4	0	150	output enable	L	SOIC16-W
	ISO7740FDBQ	DCL540L01	★	3	4	0	150	output enable	L	SOIC16-W
	ISO7740FQDWQ1	DCL540L01	★	1	4	0	150	output enable	L	SOIC16-W
	ISO7740FQDBQQ1	DCL540L01	★	3	4	0	150	output enable	L	SOIC16-W
	ISO7741FQDWQ1	DCL540L01	★	1	4	0	150	output enable	L	SOIC16-W
	ISO7741FQDWWQ1	DCL540L01	★	3	4	0	150	output enable	L	SOIC16-W
	ISO7741FQDBQQ1	DCL540L01	★	3	4	0	150	output enable	L	SOIC16-W
	ISO7240M	DCL540H01	★	1	4	0	150	output enable	H	SOIC16-W
	ISO7640FM	DCL540H01	★	1	4	0	150	output enable	H	SOIC16-W
	ISO7740DW	DCL540H01	★	1	4	0	150	output enable	H	SOIC16-W
	ISO7740DBQ	DCL540H01	★	3	4	0	150	output enable	H	SOIC16-W
	ISO7740QDWQ1	DCL540H01	★	1	4	0	150	output enable	H	SOIC16-W
	ISO7740QDBQQ1	DCL540H01	★	3	4	0	150	output enable	H	SOIC16-W
ISO7741QDWQ1	DCL540H01	★	1	4	0	150	output enable	H	SOIC16-W	
ISO7741QDBQQ1	DCL540H01	★	3	4	0	150	output enable	H	SOIC16-W	
ISO7741QDWWQ1	DCL540H01	★	3	4	0	150	output enable	H	SOIC16-W	
ADI	ADuM141D0BRZ	DCL541A01	★	3	4	1	150	input disable	L	SOIC16-W
	ADuM141E0BRZ	DCL541A01	★	4	4	1	150	input disable	L	SOIC16-W
	ADuM141D0BRWZ	DCL541A01	★	1	4	1	150	input disable	L	SOIC16-W
	ADuM141D0BRQZ	DCL541A01	★	3	4	1	150	input disable	L	SOIC16-W
	ADuM141E0BRQZ	DCL541A01	★	4	4	1	150	input disable	L	SOIC16-W
	ADuM241D0BRWZ	DCL541A01	★	1	4	1	150	input disable	L	SOIC16-W
	ADuM241E0BRWZ	DCL541A01	★	2	4	1	150	input disable	L	SOIC16-W

Manufacturer	Competitor's Product	Toshiba								
	Part Number	Part Number	Compatible Level (Note:1)	Total Channels	Reverse Channels	Data Rate [Mbps]	Control signal	Default State	Package	
	ADuM241D0BRIZ	DCL541A01 ★	1	4	1	150	input disable	L	SOIC16-W	
	ADuM241E0BRIZ	DCL541A01 ★	2	4	1	150	input disable	L	SOIC16-W	
	ADuM141D1BRZ	DCL541B01 ★	3	4	1	150	input disable	H	SOIC16-W	
	ADuM141E1BRZ	DCL541B01 ★	4	4	1	150	input disable	H	SOIC16-W	
	ADuM141D1BRWZ	DCL541B01 ★	1	4	1	150	input disable	H	SOIC16-W	
	ADuM141D1BRQZ	DCL541B01 ★	3	4	1	150	input disable	H	SOIC16-W	
	ADuM141E1BRWZ	DCL541B01 ★	2	4	1	150	input disable	H	SOIC16-W	
	ADuM141E1WBRWZ	DCL541B01 ★	2	4	1	150	input disable	H	SOIC16-W	
	ADuM141E0BRWZ	DCL541B01 ★	2	4	1	150	input disable	H	SOIC16-W	
	ADuM141E1BRQZ	DCL541B01 ★	4	4	1	150	input disable	H	SOIC16-W	
	ADuM141E1WBRQZ	DCL541B01 ★	4	4	1	150	input disable	H	SOIC16-W	
	ADuM241D1BRWZ	DCL541B01 ★	1	4	1	150	input disable	H	SOIC16-W	
	ADuM241E1BRWZ	DCL541B01 ★	2	4	1	150	input disable	H	SOIC16-W	
	ADuM241E1WBRWZ	DCL541B01 ★	2	4	1	150	input disable	H	SOIC16-W	
	ADuM241D1BRIZ	DCL541B01 ★	1	4	1	150	input disable	H	SOIC16-W	
	ADuM241E1BRIZ	DCL541B01 ★	2	4	1	150	input disable	H	SOIC16-W	
	ADuM140D0BRZ	DCL540L01 ★	4	4	0	150	output enable	L	SOIC16-W	
	ADuM140E0BRZ	DCL540L01 ★	3	4	0	150	output enable	L	SOIC16-W	
	ADuM140D0BRWZ	DCL540L01 ★	2	4	0	150	output enable	L	SOIC16-W	
	ADuM140D0BRQZ	DCL540L01 ★	4	4	0	150	output enable	L	SOIC16-W	
	ADuM140E0BRWZ	DCL540L01 ★	1	4	0	150	output enable	L	SOIC16-W	
	ADuM140E0BRQZ	DCL540L01 ★	3	4	0	150	output enable	L	SOIC16-W	
	ADuM240D0BRWZ	DCL540L01 ★	2	4	0	150	output enable	L	SOIC16-W	
	ADuM240E0BRWZ	DCL540L01 ★	1	4	0	150	output enable	L	SOIC16-W	
	ADuM240E0WBRWZ	DCL540L01 ★	1	4	0	150	output enable	L	SOIC16-W	
	ADuM240D0BRIZ	DCL540L01 ★	2	4	0	150	output enable	L	SOIC16-W	
	ADuM240E0BRIZ	DCL540L01 ★	1	4	0	150	output enable	L	SOIC16-W	
	ADuM140D1BRZ	DCL540H01 ★	4	4	0	150	output enable	H	SOIC16-W	
	ADuM140E1BRZ	DCL540H01 ★	3	4	0	150	output enable	H	SOIC16-W	
	ADuM140D1BRWZ	DCL540H01 ★	2	4	0	150	output enable	H	SOIC16-W	
	ADuM140D1BRQZ	DCL540H01 ★	4	4	0	150	output enable	H	SOIC16-W	
	ADuM140E1BRWZ	DCL540H01 ★	1	4	0	150	output enable	H	SOIC16-W	
	ADuM140E1WBRWZ	DCL540H01 ★	1	4	0	150	output enable	H	SOIC16-W	
	ADuM140E1BRQZ	DCL540H01 ★	3	4	0	150	output enable	H	SOIC16-W	
	ADuM240D1BRWZ	DCL540H01 ★	2	4	0	150	output enable	H	SOIC16-W	
	ADuM240E1BRWZ	DCL540H01 ★	1	4	0	150	output enable	H	SOIC16-W	
	ADuM240D1BRIZ	DCL540H01 ★	2	4	0	150	output enable	H	SOIC16-W	
	ADuM240E1BRIZ	DCL540H01 ★	1	4	0	150	output enable	H	SOIC16-W	
Skyworks	Si8640BB-B-IS	DCL540L01 ★	1	4	0	150	output enable	L	SOIC16-W	
	Si8640BB-B-IS1	DCL540L01 ★	3	4	0	150	output enable	L	SOIC16-W	
	Si8640BC-B-IS1	DCL540L01 ★	3	4	0	150	output enable	L	SOIC16-W	
	Si8640BD-B-IS	DCL540L01 ★	1	4	0	150	output enable	L	SOIC16-W	
	Si8640BT-IS	DCL540L01 ★	1	4	0	150	output enable	L	SOIC16-W	
	Si8640BA-B-IU	DCL540L01 ★	3	4	0	150	output enable	L	SOIC16-W	
	Si8640BB-B-IU	DCL540L01 ★	3	4	0	150	output enable	L	SOIC16-W	
	Si8640BD-B-IS2	DCL540L01 ★	1	4	0	150	output enable	L	SOIC16-W	
	Si8640EC-B-IS1	DCL540H01 ★	3	4	0	150	output enable	H	SOIC16-W	

Manufacturer	Competitor's Product	Toshiba								
	Part Number	Part Number	Compatible Level (Note:1)	Total Channels	Reverse Channels	Data Rate [Mbps]	Control signal	Default State	Package	
	Si8640ED-B-IS	DCL540H01	★ 1	4	0	150	output enable	H	SOIC16-W	
	Si8640ET-IS	DCL540H01	★ 1	4	0	150	output enable	H	SOIC16-W	
	Si8640EB-B-IU	DCL540H01	★ 3	4	0	150	output enable	H	SOIC16-W	
	Si8640ED-B-IS2	DCL540H01	★ 1	4	0	150	output enable	H	SOIC16-W	
	Si8645BA-B-IU	DCL540C01	★ 3	4	0	150	without	L	SOIC16-W	
	Si8645BB-B-IS	DCL540C01	★ 1	4	0	150	without	L	SOIC16-W	
	Si8645BB-B-IS1	DCL540C01	★ 3	4	0	150	without	L	SOIC16-W	
	Si8645BC-B-IS1	DCL540C01	★ 3	4	0	150	without	L	SOIC16-W	
	Si8645BD-B-IS	DCL540C01	★ 1	4	0	150	without	L	SOIC16-W	
	Si8645BT-IS	DCL540C01	★ 1	4	0	150	without	L	SOIC16-W	
	Si8645BA-C-IU	DCL540C01	★ 3	4	0	150	without	L	SOIC16-W	
	Si8645BB-B-IS	DCL540C01	★ 1	4	0	150	without	L	SOIC16-W	
	Si8645BB-B-IU	DCL540C01	★ 3	4	0	150	without	L	SOIC16-W	
	Si8645ET-IS	DCL540C01	★ 1	4	0	150	without	H	SOIC16-W	

★ Under Development (The specification is subject to change without notice.)

Note:1

- 1: Package and characteristics are almost same
- 2: Almost same package but similar characteristics
- 3: Almost same characteristics but different package
- 4: Different package and similar characteristics

Photorelays (1-Form-A)

Manufacturer	Competitor's Product	Toshiba					
		Part Number	Compatible Level (Note:1)	OFF-state Output Terminal Voltage	ON-state Current	Package	
Panasonic	AQV201	TLP3544	1	40 V	3.5 A	DIP6	
	AQV202	TLP3545A	1	60 V	4 A	DIP6	
	AQV204	TLP223GA	☆	400 V	0.12 A	DIP4	
	AQV210EH	TLP240G	4	350 V	0.10 A	DIP4	
	AQV210S	TLP192G	1	350 V	0.11 A	2.54SOP6	
	AQV212	TLP240A	3	60 V	0.5 A	DIP4	
	AQV212S	TLP176AM	3	60 V	0.7 A	4pin SO6	
	AQV214	TLP223GA	☆	400 V	0.12 A	DIP4	
	AQV214E	TLP223GA	☆	400 V	0.12 A	DIP4	
	AQV214EH	TLP223GA	☆	400 V	0.12 A	DIP4	
	AQV214H	TLP223GA	☆	400 V	0.12 A	DIP4	
	AQV214S	TLP172GAM	3	400 V	0.11 A	4pin SO6	
	AQV215	TLP3546A	1	100 V	3.5 A	DIP6	
	AQV215S	TLP3109A	1	100 V	3 A	2.54SOP6	
	AQV216	TLP223J	☆	400 V	0.09 A	DIP4	
	AQV217S	TLP171D	3	200 V	0.2 A	2.54SOP4	
	AQV227NS	TLP199D	2	200 V	0.2 A	2.54SOP6	
	AQV251G	TLP3543A	1	30 V	5 A	DIP6	
	AQV252	TLP3545A	1	60 V	4 A	DIP6	
	AQV252G	TLP3545A	1	60 V	4 A	DIP6	
	AQV252G2S	TLP3107A	1	60 V	4 A	2.54SOP6	
	AQV252G3S	TLP3107A	1	60 V	4 A	2.54SOP6	
	AQV254	TLP223GA	☆	400 V	0.12 A	DIP4	
	AQV254H	TLP223GA	☆	400 V	0.12 A	DIP4	
	AQV255	TLP3546A	1	100 V	3.5 A	DIP6	
	AQV255GS	TLP3109A	1	100 V	3 A	2.54SOP6	
	AQV255G3S	TLP3109A	1	100 V	3 A	2.54SOP6	
	AQV258	TLX9160T	☆	3	1500 V	0.05 A	SO16L-T
	AQY210LS	TLP174G	1	350 V	0.12 A	2.54SOP4	
	AQY210S	TLP172GM	1	350 V	0.11 A	4pin SO6	
	AQY211EH	TLP241A	1	40 V	2.0 A	DIP4	
	AQY211G2S	TLP3127	1	60 V	1.7 A	2.54SOP4	
	AQY212G2S	TLP3122A	1	60 V	1.4 A	4pin SO6	
	AQY212GS	TLP3122A	1	60 V	1.4 A	4pin SO6	
	AQY212S	TLP176AM	1	60 V	0.7 A	4pin SO6	
	AQY214EH	TLP223GA	☆	400 V	0.12 A	DIP4	
	AQY214S	TLP172GAM	1	400 V	0.11 A	2.54SOP4	
	AQY216EH	TLP223J	☆	600 V	0.09 A	DIP4	
	AQY221N2S	TLP3440S	☆	40 V	0.12 A	S-VSON4T	
	AQY221N2V	TLP3440S	☆	40 V	0.12 A	S-VSON4T	
	AQY221R2S	TLP3475S	☆	40 V	0.4 A	S-VSON4T	
	AQY221R2V	TLP3414	1	40 V	0.25 A	S-VSON4	
	AQY221R6T	TLP3406S	4	30 V	1.5 A	S-VSON4	
	AQY222R2V	TLP3475S	☆	40 V	0.4 A	S-VSON4	
	AQY225R1S	TLP3409S	4	100 V	0.65 A	S-VSON4	
	AQY225R2S	TLP3419	4	80 V	0.2 A	VSON4	
	AQY225R2V	TLP3417	☆	40 V	0.12 A	VSON4	
AQY234S	TLP172GAM	1	400 V	0.11 A	4pin SO6		
AQY275	TLP241B	☆	100 V	2 A	DIP4		
IXYS	CPC1330	TLP223GA	☆	400 V	0.12 A	DIP4	
	CPC1393	TLP223J	☆	1	600 V	0.09 A	DIP4
Renesas	LCA100	TLP223GA	☆	3	400 V	0.12 A	DIP4
	PS7113-1A	TLP3546A	2	100 V	3.5 A	DIP6	
	PS7141E-1A	TLP223GA	☆	3	400 V	0.12 A	DIP4
	PS7160-1A	TLP223J	☆	3	600 V	0.09 A	DIP4
	PS7206-1A	TLP176AM	1	60 V	0.7 A	4pin SO6	
	PS7241E-1A	TLP172GAM	1	400 V	0.11 A	2.54SOP4	
	PS7341-1A	TLP223GA	☆	3	400 V	0.12 A	DIP4
	PS7360-1A	TLP223J	☆	3	600 V	0.09 A	DIP4
	PS7804-1A	TLP3475S	☆	3	60 V	0.4 A	S-VSON4T

☆ New Products

Note:1

- 1: Package and characteristics are almost same
- 2: Almost same package but similar characteristics
- 3: Almost same characteristics but different package
- 4: Different package and similar characteristics

Photorelays (1-Form-A)

Manufacturer	Competitor's Product	Toshiba				
		Part Number	Compatible Level (Note:1)	OFF-state Output Terminal Voltage	ON-state Current	Package
TOWARD	AB21RS	TLP176AM	1	60 V	0.7 A	4pin SO6
	AB38S	TLP170J	1	600 V	0.09 A	2.54SOP4
	AB31S	TLP172GM	2	350 V	0.11 A	4pin SO6
	AB37S	TLP176AM	1	60 V	0.7 A	4pin SO6
	AB45S	TLP176AM	1	60 V	0.7 A	4pin SO6
	AB34S	TLP176D	1	200 V	0.2 A	2.54SOP4
	AB30S	TLP172GAM	1	400 V	0.11 A	2.54SOP4
	AB37	TLP240A	1	60 V	0.5 A	DIP4
	AB45	TLP240A	1	60 V	0.5 A	DIP4
	AB34	TLP240D	1	200 V	0.25 A	DIP4
	AB31	TLP240G	2	350 V	0.10 A	DIP4
	AB30	TLP223GA ☆	1	400 V	0.12 A	DIP4
	AB38	TLP223J ☆	1	600 V	0.09 A	DIP4
	AB26	TLP241A	1	40 V	2.0 A	DIP4
	AB47	TLP3556A	2	100 V	2.0 A	DIP4
	AB48	TLP3556A	1	100 V	2.0 A	DIP4
BROADCOM	ASSR-601J	TLX9160T ☆	1	1500 V	0.05 A	SO16L-T

Photorelays (2-Form-A)

Manufacturer	Competitor's Product	Toshiba				
		Part Number	Compatible Level (Note:1)	OFF-state Output Terminal Voltage	ON-state Current	Package
Panasonic	AQW210	TLP240G x 2 pcs	4	350 V	0.1 A	DIP4
	AQW210EH	TLP223GA x 2 pcs ☆	4	400 V	0.12 A	DIP4
	AQW210HL	TLP224G-2	2	350 V	0.12 A	DIP8
	AQW210S	TLP172GM x 2 pcs	3	350 V	0.11 A	4pin SO6
	AQW212	TLP240A x 2 pcs	4	60 V	0.5 A	DIP4
	AQW212EH	TLP240A x 2 pcs	4	60 V	0.5 A	DIP4
	AQW212S	TLP202A	1	60 V	0.4 A	2.54SOP8
	AQW214	TLP223GA x 2 pcs ☆	3	400 V	0.12 A	DIP4
	AQW214EH	TLP223GA x 2 pcs ☆	3	400 V	0.12 A	DIP4
	AQW214S	TLP206GA	1	400 V	0.12 A	2.54SOP8
	AQW215	TLP3556A x 2 pcs	3	100 V	2.0 A	DIP4
	AQW216	TLP223J x 2 pcs ☆	3	600 V	0.09 A	DIP4
	AQW216EH	TLP223J x 2 pcs ☆	3	600 V	0.09 A	DIP4
	AQW217	TLP240D x 2 pcs	3	200 V	0.25 A	DIP4
	AQW223R2S	TLP240G x 2 pcs	4	350 V	0.1 A	DIP4
	AQW227N	TLP240D x 2 pcs	3	200 V	0.25 A	DIP4
	IXYS	CPC2014N	TLP202A	1	60 V	0.4 A
CPC2017N		TLP202A	4	60 V	0.4 A	2.54SOP8
CPC2025N		TLP206GA	4	400 V	0.12 A	2.54SOP8
CPC2030N		TLP206G	4	350 V	0.12 A	2.54SOP8
Renesas	PS7241-2A	TLP172GAM x 2 pcs	3	400 V	0.11 A	4pin SO6

Photorelays (1-Form-A / 1-Form-B)

Manufacturer	Competitor's Product	Toshiba				
		Part Number	Compatible Level (Note:1)	OFF-state Output Terminal Voltage	ON-state Current	Package
Panasonic	AQW610EH	TLP4006G	1	350 V	0.12 A	DIP8
	AQW610S	TLP4026G	1	350 V	0.12 A	2.54SOP8
	AQW614	TLP4006G	2	350 V	0.12 A	DIP8
	AQW614EH	TLP4006G	2	350 V	0.12 A	DIP8
	AQW654	TLP4006G	2	350 V	0.12 A	DIP8

☆ New Products

Note:1

- 1: Package and characteristics are almost same
- 2: Almost same package but similar characteristics
- 3: Almost same characteristics but different package
- 4: Different package and similar characteristics

Photorelays (1-Form-B, 2-Form-B)

Manufacturer	Competitor's Product	Toshiba					
		Part Number	Compatible Level (Note:1)	OFF-state Output Terminal Voltage	ON-state Current	Package	
Panasonic	AQV410EH	TLP4597G	1	350 V	0.15 A	DIP6	
	AQV414	TLP4597G	2	350 V	0.15 A	DIP6	
	AQV414E	TLP4597G	2	350 V	0.15 A	DIP6	
	AQV414S	TLP4197G	2	350 V	0.12 A	2.54SOP6	
	AQV454	TLP4597G	2	350 V	0.15 A	DIP6	
	AQV454H	TLP4597G	2	350 V	0.15 A	DIP6	
	AQY410EH	TLP4227G	1	350 V	0.15 A	DIP4	
	AQY410S	TLP4176G	1	350 V	0.12 A	2.54SOP4	
	AQY412S	TLP4176A	1	60 V	0.5 A	2.54SOP4	
	AQY412SX	TLP4176A	1	60 V	0.5 A	2.54SOP4	
	AQY412SZ	TLP4176A	1	60 V	0.5 A	2.54SOP4	
	AQY414EH	TLP4227G	2	350 V	0.15 A	DIP4	
	AQY414S	TLP4176G	2	350 V	0.12 A	2.54SOP4	
	AQW414	TLP4227G-2	2	350 V	0.15 A	DIP8	
	AQW414EH	TLP4227G-2	2	350 V	0.15 A	DIP8	
	AQW414S	TLP4206G	2	350 V	0.12 A	2.54SOP8	
	AQW454	TLP4227G-2	2	350 V	0.15 A	DIP8	
	IXYS	CPC1125N	TLP4176G	2	350 V	0.12 A	2.54SOP4
		CPC1130N	TLP4176G	1	350 V	0.12 A	2.54SOP4
		CPC1135N	TLP4176G	1	350 V	0.12 A	2.54SOP4
CPC1150N		TLP4176G	1	350 V	0.12 A	2.54SOP4	
CPC1231N		TLP4176G	1	350 V	0.12 A	2.54SOP4	
CPC1333		TLP4227G	2	350 V	0.15 A	DIP4	
CPC2125N		TLP4206G	4	350 V	0.12 A	2.54SOP8	
LBB110		TLP4227G-2	1	350 V	0.15 A	DIP8	
LCB110		TLP4597G	2	350 V	0.15 A	DIP6	
LCB111		TLP4597G	2	350 V	0.15 A	DIP6	
LCB710		TLP4590A ☆	1	60 V	1.2 A	DIP6	
PBB190		TLP4227G-2	2	350 V	0.15 A	DIP8	
PLB190		TLP4597G	2	350 V	0.15 A	DIP6	
XBB170		TLP4227G-2	1	350 V	0.15 A	DIP8	
XCB170		TLP4597G	1	350 V	0.15 A	DIP6	

☆ New Products

Note:1

- 1: Package and characteristics are almost same
- 2: Almost same package but similar characteristics
- 3: Almost same characteristics but different package
- 4: Different package and similar characteristics

• The information presented in this cross reference is based on TOSHIBA's selection criteria and should be treated as a suggestion only. Please carefully review the latest versions of all relevant information on the TOSHIBA products, including without limitation data sheets and validate all operating parameters of the TOSHIBA products to ensure that the suggested TOSHIBA products are truly compatible with your design and application.

• Please note that this cross reference is based on TOSHIBA's estimate of compatibility with other manufacturers' products, based on other manufacturers' published data, at the time the data was collected.

• TOSHIBA is not responsible for any incorrect or incomplete information. Information is subject to change at any time without notice.

6. Part Naming Conventions

3-Digit Part Numbering Example (Except Alphabetical Characters)

Example of Photocouplers

TLP 1 76 A
① ② ③ ④

- ① Photocoupler
- ② Package Type
 - 1: SO6 / SOP
 - 2: SO4 / SOP / SOP16 / DIP (2500 Vrms / 5000 Vrms)
 - 3: SO6L / DIP (5000 Vrms)
 - 4: DIP4 (5000 Vrms)
 - 5: DIP (2500 Vrms)
 - 6: DIP (5000 Vrms)
 - 7: DIP (4000 Vrms)
- ③ Output Type
 - 00 to 09: IC Output, Photorelay
 - 10 to 19: IC Output
 - 20 to 29: 4 / 8 / 16-pin multi-channel Photocoupler
 - 30 to 39: 6 pin
 - 40 to 49: Thyristor Output, Photorelay
 - 50 to 59: IC Output
 - 60 to 69: Triac Output
 - 70 to 79: Photorelay
 - 80 to 89: Transistor Output / Darlingtion Transistor Output
 - 90 to 99: Transistor Output, Photorelay, Photovoltaic Output
- ④ Suffix
 - Withstand Voltage Level
 - (a) Photorelay (b) Triac Output, Thyristor Output
 - A: 40 V, 60 V G: 400 V
 - D: 200 V J: 600 V
 - G: 350 V L: 800 V
 - GA: 400 V
 - J: 600 V

4-Digit Part Numbering Example (Except Alphabetical Characters)

Example of Photocouplers

TLP 2 7 61 A
① ② ③ ④ ⑤

- ① Photocoupler
- ② Product category
 - 2: IC Output (logic, IPM Drivers)
 - 3: Photorelay (1-form-A) / Triac Output / Photovoltaic Output
 - 4: Photorelay (except 1-form-A)
 - 5: IC Output (Power Device Driver / Smart Gate Driver)
 - 7: Isolation Amplifier
- ③ Package category

Number	Package Type		Product Category
	IC Output / Isolation Amplifier	Photorelay	Triac Output / Photovoltaic Output
0	SO4 / MFSOP6	-	Triac Output
1	SO8 (Dual ch.)	SOP	-
2	SO8L (Dual ch.), SO16L	SSOP	-
3	SO6	USOP	-
4	SO8 (Single ch.)	VSON, P-SON	-
5	-	DIP	-
6	DIP8 (Dual ch.)	-	-
7	SO6L	-	Triac Output
8	SO8L (Single ch.)	-	-
9	DIP8 (Single ch.)	-	Photovoltaic Output

- ④ Serial Number
- ⑤ Suffix

Part Naming Example for Digital Isolators

Standard Digital Isolators

Example of Standard Digital Isolators

DC L 5 4 0 C 0 1
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Digital Isolator
- ② Output Type
 - L: Logic
- ③ Data rate
 - 1: to 1Mbps
 - 2: to 10Mbps
 - 3: to 50Mbps
 - 4: to 100Mbps
 - 5: to 200Mbps
- ④ Total Channel
 - 4: 4 channel
- ⑤ Reverse channel
 - 0: None
 - 1: 1 channel
- ⑥ Control-pin (Default output)
 - L: Enable (Low)
 - H: Enable (High)
 - A: Disable (Low)
 - B: Disable (High)
 - C: None (Low)
 - D: None (High)
- ⑦ Option
 - 0: None
- ⑧ Package Type
 - 1: SOIC16-W

Part Naming Example for Automotive Devices

Photocouplers (Output: Transistor, IC, Photovoltaic)

Example of Photocoupler

TLX 9 304
① ② ③

- ① Photocoupler (For Automotive Device)
- ② 9: For Automotive Device
- ③ Serial Number

Photorelays

Example of Photorelay

TLX 9 175 J
① ② ③ ④

- ① Photorelay (For Automotive Device)
- ② 9: For Automotive Device
- ③ Serial Number
- ④ Withstand Voltage Level
 - J: 600 V
 - T: 1500 V

Note: For those parts which do not follow the part naming convention shown above, see the appropriate datasheet.

7. Part Number Index

Part Number	Page
DCL5xx	
DCL540C01	16
DCL540D01	16
DCL540L01	16
DCL540H01	16
DCL541A01	16
DCL541B01	16
TLP1xx	
TLP104	4, 8
TLP109	3
TLP109(IGM)	9
TLP151A	10
TLP152	10
TLP155E	10
TLP170A	17
TLP170AM	17
TLP170D	17
TLP170G	18
TLP170GM	18
TLP170J	18
TLP171A	17
TLP171D	17
TLP171GA	18
TLP171J	18
TLP172GAM	18
TLP172GM	18
TLP174G	18
TLP174GA	18
TLP175A	17
TLP176AM	17
TLP176D	18
TLP176GA	18
TLP179D	17
TLP182	14
TLP183	14

Part Number	Page
TLP184(SE)	14
TLP185(SE)	14
TLP187	14
TLP188	14
TLP192A	17
TLP192G	18
TLP197G	18
TLP197GA	18
TLP199D	17
TLP2xx	
TLP200D	21
TLP202A	21
TLP202G	21
TLP206G	21
TLP206GA	21
TLP2105	6
TLP2108	5
TLP2110	6
TLP2118E	4
TLP2160	5
TLP2161	5
TLP2168	4
TLP2210	6
TLP223GA	18
TLP223J	18
TLP224G	18
TLP224G-2	21
TLP224GA	18
TLP224GA-2	21
TLP2261	5
TLP2270	6
TLP2301	3
TLP2303	3
TLP2304	4, 8
TLP2309	3, 4

Part Number	Page
TLP2310	6
TLP2312	6
TLP2345	6, 8
TLP2348	5, 8
TLP2355	6, 8
TLP2358	5, 8
TLP2361	5
TLP2362	4
TLP2363	4
TLP2366	5
TLP2367	5
TLP2368	4
TLP2370	6
TLP2372	6
TLP2391	7
TLP2395	7
TLP2398	7
TLP2403	3
TLP2404	4, 8
TLP2405	6, 8
TLP2408	5, 8
TLP2409	3, 9
TLP240A	17
TLP240D	18
TLP240G	18
TLP240GA	18
TLP240J	18
TLP2418	4
TLP241A	17
TLP241B	17
TLP2451A	10
TLP2466	5
TLP2468	4
TLP250H	10
TLP265J	24

Part Number	Page
TLP2662	4
TLP266J	24
TLP267J	24
TLP268J	24
TLP2701	3
TLP2703	3
TLP2704	4, 8
TLP2710	6
TLP2719	3, 4, 9
TLP2735	6, 8
TLP2745	6, 8
TLP2748	5, 8
TLP2761	5
TLP2766A	5
TLP2767	5
TLP2768A	4
TLP2770	6
TLP290(SE)	14
TLP290-4	14
TLP291(SE)	14
TLP291-4	14
TLP292	14
TLP292-4	14
TLP293	14
TLP293-4	14
TLP294-4	14
TLP295-4	14
TLP2962	4
TLP3xx	
TLP3052A	24
TLP3062A	24
TLP3064(S)	24
TLP3073	24
TLP3083	24
TLP3100	17

Part Number	Page
TLP3102	17
TLP3103	17
TLP3105	17
TLP3106A	17
TLP3107A	17
TLP3109A	17
TLP3122A	17
TLP3123	17
TLP3125	18
TLP3127	17
TLP3145	18
TLP3146	17
TLP3147	17
TLP3149	17
TLP3203	19
TLP3212	19
TLP3214	19
TLP3215	19
TLP3216	19
TLP3217	19
TLP3220	20
TLP3230	19
TLP3231	19
TLP3240	19
TLP3241	19
TLP3250	19
TLP3275	19
TLP3303	19
TLP3306	19
TLP3312	19
TLP3315	19
TLP3316	19
TLP3317	19
TLP3319	19
TLP3320	20

Part Number	Page
TLP3330	19
TLP3340	19
TLP3341	19
TLP3342	19
TLP3350	19
TLP3351	19
TLP3375	19
TLP3403	19
TLP3403R	20
TLP3403SRHA	20
TLP3406S	19
TLP3406SRH	20
TLP3406SRH4	20
TLP3406SRHA	20
TLP3406SRL	21
TLP3407S	19
TLP3407SR	20
TLP3407SRA	20
TLP3407SRA4	20
TLP3407SRH	20
TLP3407SRL	20
TLP3409S	20
TLP3412	19
TLP3412R	20
TLP3412SRA	20
TLP3412SRH	20
TLP3412SRHA	20
TLP3412SRHA4	20
TLP3414	19
TLP3417	19
TLP3419	19
TLP3420	20
TLP3431	19
TLP3440	19
TLP3440S	19

Part Number	Page
TLP3441	19
TLP3442	19
TLP3450	19
TLP3451	19
TLP3475	19
TLP3475R	20
TLP3475S	19
TLP3475SRHA	20
TLP3475SRHA4	20
TLP3480	19
TLP3481	19
TLP3482	20
TLP3483	20
TLP3484	20
TLP350H	10
TLP351A	10
TLP351H	10
TLP352	10
TLP3543A	17
TLP3544	17
TLP3545A	17
TLP3546A	17
TLP3547	17
TLP3548	18
TLP3549	18
TLP3553A	17
TLP3554	17
TLP3555A	17
TLP3556A	17
TLP3558A	18
TLP358H	10
TLP3823	17
TLP3825	18
TLP383	14
TLP385	14

Part Number	Page
TLP387	14
TLP388	14
TLP3905	23
TLP3906	23
TLP3910	23
TLP4xx	
TLP4006G	21
TLP4026G	21
TLP4176A	22
TLP4176G	22
TLP4197G	22
TLP4206G	22
TLP4227G	22
TLP4227G-2	22
TLP4590A	22
TLP4597G	22
TLP5xx	
TLP5212	12
TLP5214A	12
TLP5231	12
TLP5701	10
TLP5702	10
TLP5702H	10
TLP5705H	10
TLP5751	10
TLP5751H	10
TLP5752	10
TLP5752H	10
TLP5754	10
TLP5754H	10
TLP5771	10
TLP5771H	10
TLP5772	10
TLP5772H	10
TLP5774	10

Part Number	Page
TLP5774H	10
TLP5832	10
TLP598GA	18
TLP6xx	
TLP620M	14
TLP627M	14
TLP628M	14
TLP7xx	
TLP7820	13
TLP7830	13
TLP785	14
TLP7920	13
TLP7930	13
TLP797GA	18
TLP797J	18
TLP798GA	18
TLPNxx	
TLPN137	4
TLX9xx	
TLX9000	26
TLX9160T	26
TLX9175J	26
TLX9185A	26
TLX9188	26
TLX9291A	26
TLX9300	26
TLX9304	25
TLX9309	25
TLX9310	25
TLX9376	25
TLX9378	25
TLX9905	26
TLX9906	26

RESTRICTIONS ON PRODUCT USE

Toshiba Corporation and its subsidiaries and affiliates are collectively referred to as "TOSHIBA". Hardware, software and systems described in this document are collectively referred to as "Product".

- TOSHIBA reserves the right to make changes to the information in this document and related Product without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, lifesaving and/or life supporting medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, and devices related to power plant. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- GaAs (Gallium Arsenide) is used in Product. GaAs is harmful to humans if consumed or absorbed, whether in the form of dust or vapor. Handle with care and do not break, cut, crush, grind, dissolve chemically or otherwise expose GaAs in Product.
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

TOSHIBA

Toshiba Electronic Devices & Storage Corporation
Toshiba Electronic Device Solutions Corporation

<https://toshiba.semicon-storage.com/>